



UNIVERSITY OF CALCUTTA
OFFICE OF THE UNIVERSITY ENGINEER
87/1 College Street
Darbhanga Building, GroundFloor
Kolkata-700073
Website :-www.caluniv.ac.in

NOTICE INVITING TENDER


University of Calcutta invites **sealed** tender from resourceful and bonafide contractors for the following work

1.	N.I.T. No	:	Eng /CT-277/18-19. Dated 18/ 01/ 2019
2.	Name of Work	:	ANTI TERMITE TREATMENT AT PROF BRATATI DEYS LABORATORY BOTANY PWD SCHEDULE 2017
3.	Estimated Cost put to Tender	:-	Rs. 28438/=
4.	Earnest Money	:	A sum of Rs 1400- (Rupees One thousand four hundred only) in the form of CTS demand draft in favour of University of Calcutta payable at Kolkata is to be attached with the Tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenders on application after issuing of work order to the successful bidder. In case of sucessful tender the EMD will be returned on application after an equal amount of security deposit is ducted by the University from the running bills.
5.	Time of completion	:	20 days
6.	Eligibility Criteria	:	Valid trade License , GST & Pan and credential for satisfactory completion of similar nature of job. Amounting 75 % of the estimated value in a single tender in the last three financial year . Government, Government Undertaking and University of Calcutta credentials are accepted.(only completion certificate of the work should be treated as Credential.
7.	Last date of receipt of application f or tender	:	NA
8.	Last date of Sale/ issue of tender papers	:	TO BE DOWNLOADED FROM WEBSITE.(www. caluniv.ac.in)
9.	Last Date and Time of tender Submission	:	31/01/2019. (up to 2.00 PM)
10.	Date and Time of Tender Opening	:	On or after 3:00 PM 31/01/2019

N.I.T no ,Name of work and the date of opening should be written on the sealed envelope otherwise tender will not be opened thus cancelled.

The undersigned reserves the right to reject any or all Tenders without assigning any reason what so ever.

18.1.19
University Engineer C.U.

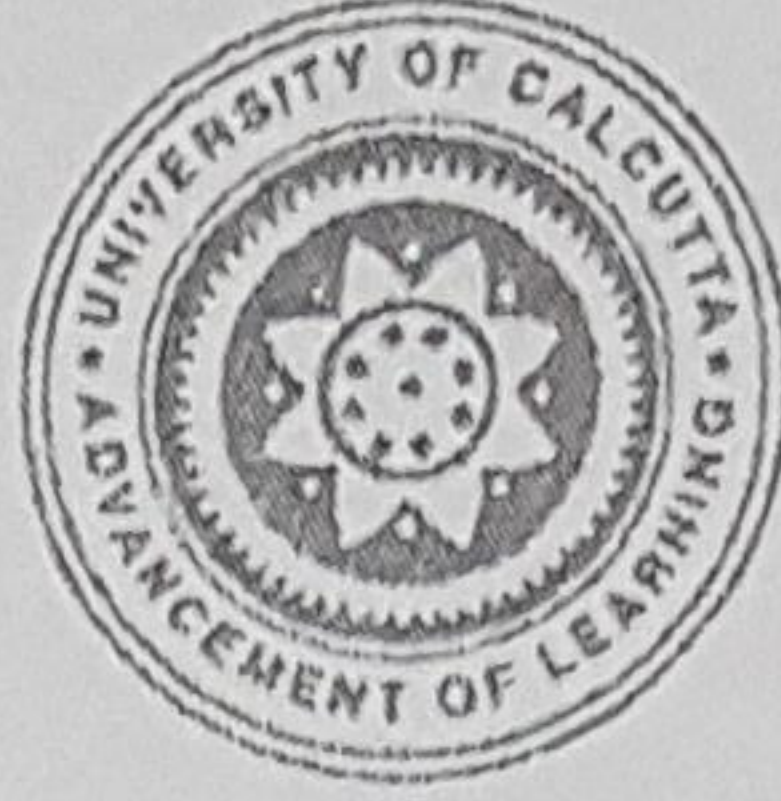

UNIVERSITY OF CALCUTTA

Name of the work:-

ANTI TERMITE TREATMENT AT PROF BRATATI DEYS LABORATORY BOTANY
PWD SCHEDULE 2017

N. I.T. no- Eng /CT-277/18-19. Dated 13/ 01/ 2019


Estimated cost Put to Tender:- Rs. 28438/=

Name of Agency:-

Address of Agency:-

Rate quoted by Agency:- (%)
Percent Above / At par / Below

Signature of the Agency with date & stamp:-

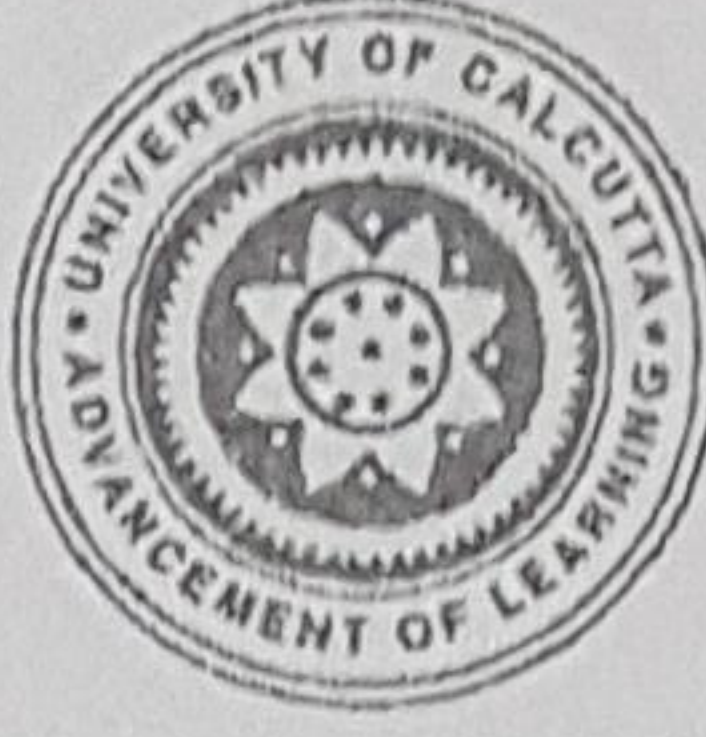


UNIVERSITY OF CALCUTTA

N. I.T. no- Eng / CT-277/18-19. Dated 18/ 01/ 2019

TENDER AND CONTRACT FOR WORK

GENERAL TERMS AND DIRECTION FOR THE GUIDANCE OF CONTRACT

1. Eligible Tenders will have to download the tender papers from the website & drop the filled tender papers signed with seal and date at every page along with copy of Valid Trade license's, GST & PAN and Credential for satisfactory completion of similar nature of job amounting to at least seventy five percent of the job value in a single tender from any Government, Govt. undertaking or University of Calcutta in the last three financial year in sealed envelope in the Tender box kept in the Office of the undersigned with in the specified time mentioned in the NIT. which will be opened by the undersigned or by his representative with in **the specified time and date mentioned in the NIT.** The tendered must write the name of the work , NIT no , the date of opening and name of the bidder on the envelop failing which the tender will not be opened thus will be treated as cancelled.
2. The rate should be quoted after inspection of the site and inclusive of all incidental charges i.e. freight, insurances, labour insurances, handling charges, necessary government taxes, duties etc as well as the Water, Electricity charges which are to be paid as per rules .
3. The contractor shall be responsible to ensure compliance with the provision of minimum wages act 1948 as modified up to date and the rules made in respect of any employees, employed by the contractor directly or through the petty or subcontractor for the purpose of carrying this contract. The contractor shall be responsible for any damage, injury or loss caused by the work or workmen to any person, animal or material during the progress of work.
4. Liquidated damage will be charged to the contractor if they fail to complete the work within the stipulated time, 0.01% per day to a maximum limit of 05 % of the contract value .

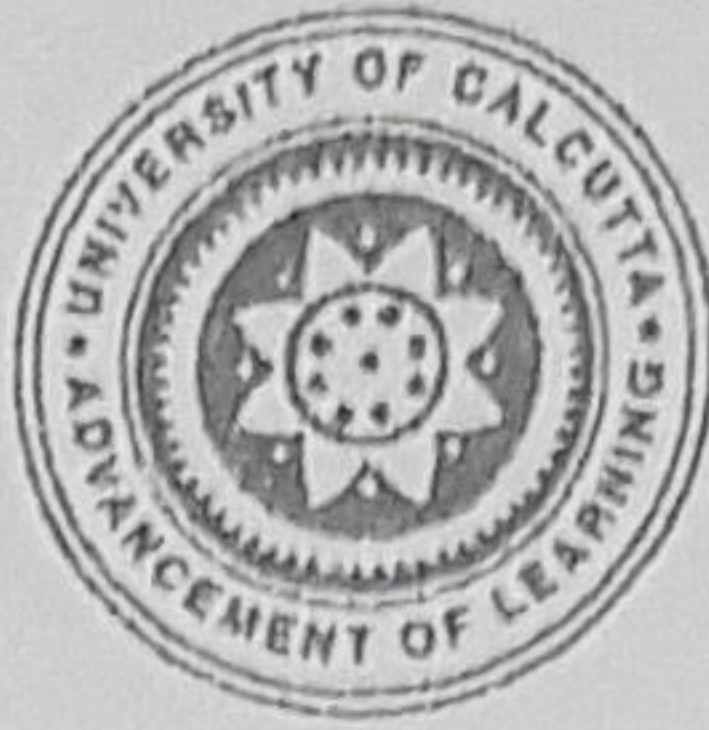

5. The allotted time for completion of the work 45 days from the date of receipt of work order. Time is the essence of this contract. Normally no time extension will be granted. In case of prayer for extension of time the University authority has the full right reserved to grant it or discard it.

6. (a) If the successful contractor's bid rate is 80% or less than the estimated amount put to tender the contractor will have to submit a Bank Guarantee amounting to 10% of the Tendered amount before issue of Work order failing which the EMD will be forfeited and the agency may be blacklisted. The Bank Guarantee should be valid till the end of the contract period and shall be renewed accordingly if required. This bank Guarantee is an Additional Performance Security. So provision of deducting Security deposit from bills will hold goods per relevant clause of the contract. The bank Guarantee shall be returned immediately on successful completion of contract.

(b) The University authority will retain a sum amounting to 10% of the bill of the contract for a period of six months from the date of completion of work as **Security Deposit**. Which will be released after a period of six months from the date of completion of the work on application.

7. A sum of 5% of the estimated amount i.e. value as mentioned in the NIT. in the form of demand draft in favour of UNIVERSITY OF CALCUTTA payable at Kolkata is to be attached with the tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenderers on application after issue of work order to the successful bidder. For successful tenderer the EMD will be returned on application after an equal amount of security deposit is deducted from the running bills.

Amount:- Rs

D.D No..... Dated / /20

Name of Issuing Bank:--

Branch :-

8. Work is to be carried out as per specification laid in the B.O.Q or PWD specification as per instruction of the University Engineer or his representative.



9. The materials brought to site for execution of the work should by no means be taken out of site without the permission of the Engineer C.U.
10. The rates must be quoted in words in figure other wise the tender will be cancelled.
11. The University will not be bound to accept the lowest bidder.
12. The University will not supply any materials to the contractor.
13. The contractor will work under the strict supervision of the Engineer/ Sub-Assistant Engineer. The estimate given along with the tender are provisional payment will be made on the actual work done jointly measured by the Engineer or his representative (Sub-Assistant Engineer) & the contractor or his representative. The contractor will have to submit bill in printed format in duplicate .
14. The contractor will have to take necessary instruction from the Engineer CU/ Sub-Assistant Engineer regarding the execution of work.
15. Defect & liability Period :- The defect & liability period will be for a period of six months from the date of completion of the job. Any defects pointed out during this period has to be mend good by the agency at their own cost failing which the retention money will be forfeited.

Sd/-

University Engineer

Name of the Agency:

Address :-

SIGNATURE OF THE CONTRACTOR WITH SEAL AND DATE

PRICE SCHEDULE FOR ANTI TERMITE TREATMENT AT PROF BRATATI DEYS LABORATORY BOTANY
DEPARTMENT AS PER PWD SCHEDULE 2017

SL NO	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
1	<p>d) Anti-termite treatment to the junction of wood work and masonry walls with chemical emulsion by admixing chloropyrofos emulsifiable concentrates (1% concentration) with water by weight including spraying at the points of contact with the adjoining masonry by drilling 6m. dia holes at a downward angle of about 45 degree at the junction of woodwork and masonry and squirting chemical emulsion into these holes at the rate of half litre per hole. The entire work is to be carried out as per specification of Code I.S.-6313 (Part-III)-1981. The shutters are to be sprayed with emulsion. on both sides. All wooden fixtures like almirahs, racks etc. are also to be thoroughly sprayed with chemical emulsion.</p> <p>(Payment will be made on the basis of outside measurements of doors and windows)</p> <p>PWD SOR Vol-I w. e. f. 1.12.2015</p>	SQM	17.3	61	1055.3
2	<p>(e) Spot application for insecticides using Aqua base spray for pest (for bugs, cockroaches, silverfish, spider, termites, mosquitoes) to walls and ceiling etc. with chemical emulsion by admixing chloropyrofos emulsifiable concentrates (1% concentration) with water by weight including spraying the emulsified chemical @ 0.5 litres per sq.m. by a hand operated pressure pump on wall surfaces, ceiling, electrical fixture, electrical lines including drilling holes in places where source of termite is detected squirting chemical solution into the holes and sealing the holes with cement grout. (Rate is per sq.m. of the floor area while actual work will be all walls ceiling, rack, partition and furniture).</p>	SQM	122.18	49	5986.82
3	<p>Supplying, Fitting & Fixing 30 mm thick Factory made moulded Door shutter, consisting of solid core single leaf flash door of 30 mm thickness lipped with 15 mm [5mmx3] thick x 30 mm wide on one style and top rail and 10 mm [5mmx2] thick x 30 mm wide of the other style and bottom rail. The inner panel laminated with 2 mm thick termite proof water proof and fire resistant moulded PVC sheet with raised panel designed in different plain/ or Prelam colour on one side after routing the moulded design on flash door and 2mm</p>				

	plain and or Prelam PVC sheet on other side using rubber adhesive on flash door and solvent cement adhesive on the PVC lipping etc. complete excluding hardwares as necessary as per direction of Engineer-in Charge, Manufacturer's Specification and drawing..	SQM	4	3272	13088
4	plaster to wall floor ceiling etc with 1:6 cement :sand mortar 25mm thick	SQM	3.72	195	725.4
5	Wood work in door and window frame fitted and fixed in position complete including a protective coat of painting at the contact surface of the frame exluding cost of concrete, Iron Butt Hinges and M.S clamps. (The quantum should be upto 3 decimal	cum	0.06	77671	<u>4660.26</u>
				A	25515.78
	Add 12 % GST				2673.25
				B	28189.03
	Add 1% labour cess			C	249.51
				Total	28438.54
					28438



UNIVERSITY OF CALCUTTA
OFFICE OF THE UNIVERSITY ENGINEER
87/1 College Street
Darbhanga Building, GroundFloor
Kolkata-700073
Website :-www.caluniv.ac.in

NOTICE INVITING TENDER


University of Calcutta invites **sealed** tender from resourceful and bonafide contractors for the following work

1.	N.I.T. No	:	Eng /CT-278/18-19. Dated 18/ 01/ 2019
2.	Name of Work	:	RENOVATION OF HOSTEL ROOM AT BARUIPUR FARM HOUSE AS PER PWD SCHEDULE 2017
3.	Estimated Cost put to Tender	:-	RS 199220/-
4.	Earnest Money	:	A sum ofRs 9950- (Rupees Nine thousand nine hundred &fifty only) in the form of CTS demand draft in favour of University of Calcutta payable at Kolkata is to be attached with the Tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenders on application after issuing of work order to the successful bidder. In case of sucessful tender the EMD will be returned on application after an equal amount of security deposit is ducted by the University from the running bills.
5.	Time of completion	:	45days
6.	Eligibility Criteria	:	Valid trade License , GST & Pan and credential for satisfactory completion of similar nature of job. Amounting 75 % of the estimated value in a single tender in the last three financial year . Government, Government Undertaking and University of Calcutta credentials are accepted.(only completion certificate of the work should be treated as Credential.
7.	Last date of receipt of application f or tender	:	NA
8.	Last date of Sale/ issue of tender papers	:	TO BE DOWNLOADED FROM WEBSITE.(www. caluniv.ac.in)
9.	Last Date and Time of tender Submission	:	31/01/2019.(up to 2.00 PM)
10.	Date and Time of Tender Opening	:	On or after 3:00 PM 31/01/2019

N.I.T no ,Name of work and the date of opening should be written on the sealed envelope otherwise tender will not be opened thus cancelled.

The undersigned reserves the right to reject any or all Tenders without assigning any reason what so ever.

University Engineer C.U.

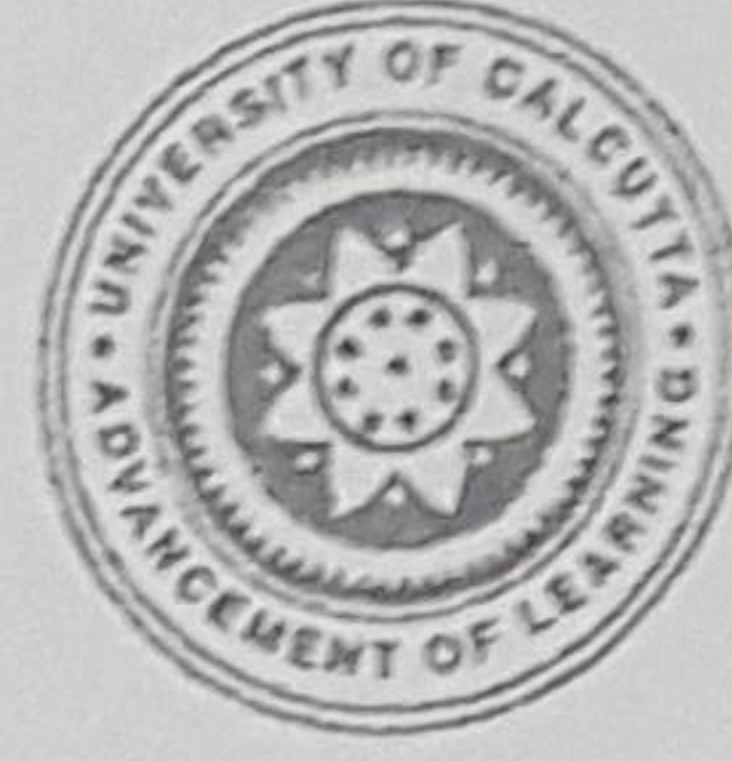

UNIVERSITY OF CALCUTTA

Name of the work:- RENOVATION OF HOSTEL ROOM AT BARUIPUR FARM HOUSE AS PER PWD SCHEDULE 2017

N. I.T. no- Eng /CT-278/18-19. Dated 12/01/2019


Estimated cost Put to Tender:- RS 199220/-

Name of Agency:-

Address of Agency:-

Rate quoted by Agency:- (%)
Percent Above / At par / Below

Signature of the Agency with date & stamp:-

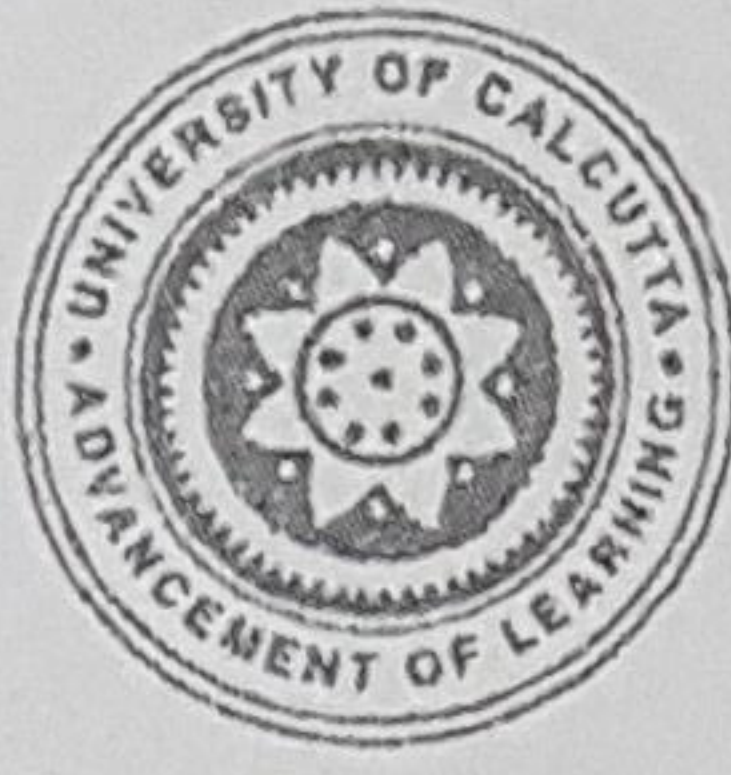

UNIVERSITY OF CALCUTTA

N. I.T. no- Eng /CT-278/18-19. Dated 13/ 01/ 2019

TENDER AND CONTRACT FOR WORK

GENERAL TERMS AND DIRECTION FOR THE GUIDANCE OF CONTRACT

1. Eligible Tenders will have to download the tender papers from the website & drop the filled tender papers signed with seal and date at every page along with copy of Valid Trade license's, GST & PAN and Credential for satisfactory completion of similar nature of job amounting to at least seventy five percent of the job value in a single tender from any Government, Govt. undertaking or University of Calcutta in the last three financial year in sealed envelope in the Tender box kept in the Office of the undersigned with in the specified time mentioned in the NIT. which will be opened by the undersigned or by his representative with in **the specified time and date mentioned in the NIT.** The tendered must write the name of the work , NIT no , the date of opening and name of the bidder on the envelop failing which the tender will not be opened thus will be treated as cancelled.
2. The rate should be quoted after inspection of the site and inclusive of all incidental charges i.e. freight, insurances, labour insurances, handling charges, necessary government taxes, duties etc as well as the Water, Electricity charges which are to be paid as per rules .
3. The contractor shall be responsible to ensure compliance with the provision of minimum wages act 1948 as modified up to date and the rules made in respect of any employees, employed by the contractor directly or through the petty or subcontractor for the purpose of carrying this contract. The contractor shall be responsible for any damage, injury or loss caused by the work or workmen to any person, animal or material during the progress of work.
4. Liquidated damage will be charged to the contractor if they fail to complete the work within the stipulated time, 0.01% per day to a maximum limit of 05 % of the contract value .



5. The allotted time for completion of the work 45 days from the date of receipt of work order .Time is the essence of this contract. Normally no time extension will be granted. In case of prayer for extension of time the University authority has the full right reserved to grant it or discard it.

6. (a) If the successful contractor's bid rate is 80% or less than the estimated amount put to tender the contractor will have to submit a Bank Guarantee amounting to 10% of the Tendered amount before issue of Work order failing which the EMD will be forfeited and the agency may be blacklisted. The Bank Guarantee should be valid till the end of the contract period and shall be renewed accordingly if required. This bank Guarantee is an Additional Performance Security .So provision of deducting Security deposit from bills will hold goods per relevant clause of the contract. The bank Gurrantee shall be returned immediately on successful completion of contract.

(b) The University authority will retain a sum amounting to 10% of the bill of the contract for a period of six months from the date of completion of work as **Security Deposit**. Which will be released after a period of six months from the date of completion of the work on application.

7. A sum of 5% of the estimated amount i.e value as mentioned in the NIT. in the form of demand draft in favour of UNIVERSITY OF CALCUTTA payable at Kolkata is to be attached with the tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenderers on application after issue of work order to the successful bidder. For successful tenderer the EMD will be returned on application after an equal amount of security deposit is deducted from the running bills.

Amount:- Rs

D.D No..... Dated / /20

Name of Issuing Bank:--

B ranch :-

8. Work is to be carried out as per specification laid in the B.O.Q or PWD specification as per instruction of the University Engineer or his representative.



9. The materials brought to site for execution of the work should by no means be taken out of site without the permission of the Engineer C.U.
10. The rates must be quoted in words in figure other wise the tender will be cancelled.
11. The University will not be bound to accept the lowest bidder.
12. The University will not supply any materials to the contractor.
13. The contractor will work under the strict supervision of the Engineer/ Sub-Assistant Engineer. The estimate given along with the tender are provisional payment will be made on the actual work done jointly measured by the Engineer or his representative (Sub-Assistant Engineer) & the contractor or his representative. The contractor will have to submit bill in printed format in duplicate .
14. The contractor will have to take necessary instruction from the Engineer CU/ Sub-Assistant Engineer regarding the execution of work.
15. Defect & liability Period :- The defect & liability period will be for a period of six months from the date of completion of the job. Any defects pointed out during this period has to be mend good by the agency at their own cost failing which the retention money will be forfeited.

Sd/-

University Engineer

Name of the Agency:

Address :-

SIGNATURE OF THE CONTRACTOR WITH SEAL AND DATE

PRICE SCHEDULE FOR RENOVATION OF HOSTEL ROOM AT BARUIPUR FARM HOUSE AS PER PWD SCHEDULE 2017

SL NO	DESCRIPTION	UNIT	RATE	QTY	AMOUNT
1	Stripping worn out plaster, raking out joints as per instruction of Engg in Charge	sqm	19	110	2090
2	Plaster to wall floor ceiling etc 1:6 cement sand mortar in floor dado wall 20mm	sqm	176	110	19360
3	Removing old paint from blistered painted surface with application of soda, sajimati or any approved chemical paint remover and exposing the original surface including cleaning and thorough washing to remove all traces of the removing agent including taking out shutters and refixing the same where	sqm	39	360	14040
4	Rendering the surface of walls and ceiling with white cement based wall putty of approved make and brand(1.5mm thick	sqm	110	50	5500
5	Priming one coat on timber plastered surface ...sand papering etc	sqm	29	360	10440
6	Applying acrylic emulsion paint of app make and brand...on walls and ceiling luxury quality two coats	sqm	62	360	22320
7	Supplying fitting fixing Aluminium partition with glass and board partilly as per requirement as per Engg in Charge	sqm	2550	26	66300
8	Painting with best quality synthetic enamel paint of approved make and brand including smoothening surface by sand papering etc. including using of approved putty etc. on the surface, if necessary Two coats	sqm	81	42	3402
9	Supplying fitting fixing PVC pipes conforming to ASTM D pvc pipes 150mm dia	metre	0	0	0
10	Removal of rubbish earth etc from the working site...as per Engg in charge	cum	168	6	1008
11	Brick work with 1st class bricks in cement mortar (1:6) in superstructure ground floor	cum	5529	0.08	442.32
12	Wood work in door window frame IT 1Pg 114/315 instruction of Engg in Charge Local Sal	cum	0	0	0
13	Scraping of moss, blisters etc.thoroughly from exterior surface of walls necessitating the use of scraper, wire brush etc.(Payment against this item will be made only when this has been done on the specific direction of the Engineer-in-charge	sqm	7	220	1540
14	Protective and Decorative Textured exterior high class matt finish paint of approved quality, composed of special Tharmoplastic Resin				

containing fine crystalline additives derive from Granite as per manufacturer's specification and as per direction of EIC to be applied over acrylic primer as required. The rate includes cost of material, labour, scaffolding and all incidental charges but excluding the cost of primer.

	In Ground floor Two coats	sqm	101	220	22220
15	Collapsible gate with 40mm x 40mm x 6mm Tee as top and bottom guide rail, 20mm x 10mm x 2mm vertical channels 100mm apart in fully stretched position 20mm x 5mm M.S. flats as collapsible bracings properly rivetted and washered including 38mm steel rollers including locking arrangements, fitted and fixed in position with lugs set in cement concrete and including cutting necessary holes, chasing etc. in walls, floors etc. and making good damage	sqm	1863	4	7452
					176114.3
	Add 12% GST				<u>21133.68</u>
					197248
	Add 1% Labour Welfare Cess				<u>1972.48</u>
				Total	199220.5

Name & Address of the Agency :

Rate Quoted by Agency :

Signature & Seal of Agency :



UNIVERSITY OF CALCUTTA
OFFICE OF THE UNIVERSITY ENGINEER
87/1 College Street
Darbhanga Building, Ground Floor
Kolkata-700073
Website :-www.caluniv.ac.in

NOTICE INVITING TENDER

University of Calcutta invites sealed tender from resourceful and bonafide contractors for the following work

1.	N.I.T. No	:	Eng /CT-279/18-19. Dated 18/ 01/ 2019
2.	Name of Work	:	REPAIR RENOVATION & PAINTING OF ROOM NO 505 OF ASSTT DR MAFIZUL HAQUE AS PER PWD SCHEDULE 2017
3.	Estimated Cost put to Tender	:-	RS 74509/-
4.	Earnest Money	:	A sum Rs3750/- (Rupees Three thousand seven hundred & Fifty only). in the form of CTS demand draft in favour of University of Calcutta payable at Kolkata is to be attached with the Tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenders on application after issuing of work order to the successful bidder. In case of successful tender the EMD will be returned on application after an equal amount of security deposit is ducted by the University from the running bills.
5.	Time of completion	:	45days
6.	Eligibility Criteria	:	Valid trade License , GST & Pan and credential for satisfactory completion of similar nature of job. Amounting 75 % of the estimated value in a single tender in the last three financial year . Government, Government Undertaking and University of Calcutta credentials are accepted.(only completion certificate of the work should be treated as Credential.
7.	Last date of receipt of application for tender	:	NA
8.	Last date of Sale/ issue of tender papers	:	TO BE DOWNLOADED FROM WEBSITE.(www. caluniv.ac.in)
9.	Last Date and Time of tender Submission	:	31/01/2019.(up to 2.00 PM)
10.	Date and Time of Tender Opening	:	On or after 3:00 PM 31/01/2019

N.I.T no ,Name of work and the date of opening should be written on the sealed envelope otherwise tender will not be opened thus cancelled.

The undersigned reserves the right to reject any or all Tenders without assigning any reason what so ever.

18/1/19
University Engineer C.U.



UNIVERSITY OF CALCUTTA

Name of the work:- REPAIR RENOVATION & PAINTING OF ROOM NO 505 OF ASSTT DR MAFIZUL HAQUE AS PER PWD SCHEDULE 2017

N. I.T. no- Eng /CT-279/18-19. **Dated:** 01/ 01/ 2019

Estimated cost Put to Tender:- RS 74509/-

Name of Agency:-

Address of Agency:-

Rate quoted by Agency:- (%)
Percent Above / At par / Below

Signature of the Agency with date & stamp:-




UNIVERSITY OF CALCUTTA

N. I.T. no- Eng /CT-279/18-19. Dated 19/ 01/ 2019

TENDER AND CONTRACT FOR WORK

GENERAL TERMS AND DIRECTION FOR THE GUIDANCE OF CONTRACT

1. Eligible Tenders will have to download the tender papers from the website & drop the filled tender papers signed with seal and date at every page along with copy of Valid Trade license's, GST & PAN and Credential for satisfactory completion of similar nature of job amounting to at least seventy five percent of the job value in a single tender from any Government, Govt. undertaking or University of Calcutta in the last three financial year in sealed envelope in the Tender box kept in the Office of the undersigned with in the specified time mentioned in the NIT. which will be opened by the undersigned or by his representative with in **the specified time and date mentioned in the NIT.** The tendered must write the name of the work , NIT no , the date of opening and name of the bidder on the envelop failing which the tender will not be opened thus will be treated as cancelled.
2. The rate should be quoted after inspection of the site and inclusive of all incidental charges i.e. freight, insurances, labour insurances, handling charges, necessary government taxes, duties etc as well as the Water, Electricity charges which are to be paid as per rules .
3. The contractor shall be responsible to ensure compliance with the provision of minimum wages act 1948 as modified up to date and the rules made in respect of any employees, employed by the contractor directly or through the petty or subcontractor for the purpose of carrying this contract. The contractor shall be responsible for any damage, injury or loss caused by the work or workmen to any person, animal or material during the progress of work.
4. Liquidated damage will be charged to the contractor if they fail to complete the work within the stipulated time, 0.01% per day to a maximum limit of 05 % of the contract value .

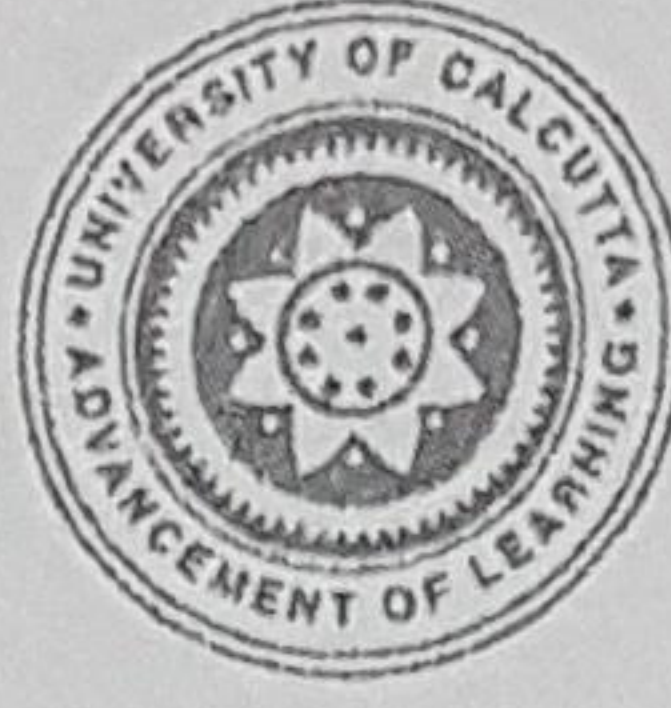

5. The allotted time for completion of the work 45 days from the date of receipt of work order. Time is the essence of this contract. Normally no time extension will be granted. In case of prayer for extension of time the University authority has the full right reserved to grant it or discard it.

6. (a) If the successful contractor's bid rate is 80% or less than the estimated amount put to tender the contractor will have to submit a Bank Guarantee amounting to 10% of the Tendered amount before issue of Work order failing which the EMD will be forfeited and the agency may be blacklisted. The Bank Guarantee should be valid till the end of the contract period and shall be renewed accordingly if required. This bank Guarantee is an Additional Performance Security. So provision of deducting Security deposit from bills will hold goods per relevant clause of the contract. The bank Guarantee shall be returned immediately on successful completion of contract.

(b) The University authority will retain a sum amounting to 10% of the bill of the contract for a period of six months from the date of completion of work as **Security Deposit**. Which will be released after a period of six months from the date of completion of the work on application.

7. A sum of 5% of the estimated amount i.e. value as mentioned in the NIT. in the form of demand draft in favour of UNIVERSITY OF CALCUTTA payable at Kolkata is to be attached with the tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenderers on application after issue of work order to the successful bidder. For successful tenderer the EMD will be returned on application after an equal amount of security deposit is deducted from the running bills.

Amount:- Rs

D.D No..... Dated / /20

Name of Issuing Bank:--

Branch :-

8. Work is to be carried out as per specification laid in the B.O.Q or PWD specification as per instruction of the University Engineer or his representative.



9. The materials brought to site for execution of the work should by no means be taken out of site without the permission of the Engineer C.U.
10. The rates must be quoted in words in figure other wise the tender will be cancelled.
11. The University will not be bound to accept the lowest bidder.
12. The University will not supply any materials to the contractor.
13. The contractor will work under the strict supervision of the Engineer/ Sub-Assistant Engineer. The estimate given along with the tender are provisional payment will be made on the actual work done jointly measured by the Engineer or his representative(Sub-Assistant Engineer) & the contractor or his representative. The contractor will have to submit bill in printed format in duplicate .
14. The contractor will have to take necessary instruction from the Engineer CU/ Sub-Assistant Engineer regarding the execution of work.
15. Defect & liability Period :- The defect & liability period will be for a period of six months from the date of completion of the job. Any defects pointed out during this period has to be mend good by the agency at their own cost failing which the retention money will be forfeited.

Sd/-

University Engineer

Name of the Agency:

Address :-

SIGNATURE OF THE CONTRACTOR WITH SEAL AND DATE

PRICE SCHEDULE FOR REPAIR RENOVATION & PAINTING OF ROOM NO 505 OF ASSTT PROF DR MAFIZUL HAQUE AS PER PWD SCHEDULE 2017


SL NO	DESCRIPTION	UNIT	RATE	QTY	AMOUNT
1	Stripping off worn out plaster and raking of joints as per requirement of site and as per Engineers	sqm	19	50	950
2	Plaster to wall floor ceiling etc 1:4 cement : sand 15mm thick plaster 50sqm	sqm	194	50	9700
3	Dismantling all types of RCC cement concreteworks, stacking serviceable materials at site and removing rubbish as directed within a lead of 75m	cum	1956	1.5	2934
4	Cement concrete (1:1.5:3) with graded stone chips 5.6 mm size with hexagonal square mesh wire netting, I.R.C. fabric mesh or X.P. M. fitted and fixed after tying the existing reinforcement on concrete without distributing the same and with proper scarping and cleaning the reinforcement and disturbed concrete with wire brush etc. after applying a coat of cement including the cost of wire netting I.R.C or X. P. M. & cost of all handling and scaffolding complete as per direction of Engineer-in -charge. 20mm thick	cum	488	30	14640
5	Removal of rubbish,earth etc. from the working site and disposal of the same beyond the compound, in conformity with the Municipal / Corporation Rules for such disposal, loading into truck and cleaning the site in all respect as per direction of Engineer in charge	cum	166	6.5	1079
6	Applying epoxy based reactive joining agent for joining the old concrete with fresh concrete to be applied within manufacturer's specified time as per manufacturers specification. (0.4 Kg / m ² of concrete surface). .4x37.64 Cleaning the concrete surface by removing dirt and debris, marking defective locations and removing loose concrete by careful stripping untill hard surface is exposed, cutting the concrete to regular shape, wire brushing the exposed surface and removing debris from site complete as per direction of the Engineer - in - Charge	sqm	309	30	9270
7	Removing old paint from blistered painted surface with application of soda, sajimati or any approved chemical paint remover and exposing the original surface including cleaning and thorough washing to remove all traces of the removing agent including taking out shutters and refixing the same where necessary	sqm	39	100	3900
8	Priming one coat on timber or plastered surface with synthetic oil bound primer of approved quality including smoothening surfaces by sand papering etc.	sqm	38	100	3800
9	Painting with best quality synthetic enamel paint of approved make and brand including smoothening surface by sand papering etc. including				

	using of approved putty etc. on the surface, if necessary :				
	Two coats (with any shade except white)	sqm	81	11.04	894.24
10	Synthetic Distemper to interior wall, ceiling with a coat of solvent based interior grade acrylic primer (as per manufacturer's specification) including cleaning and smoothing of surface.				
	Two Coats	sqm	68	100	6800
11	Rendering the Surface of walls and ceiling with White Cement base WATER PROOF wall putty of approved make & brand.(1.5 mm thick)				
	Stripping off worn out plaster and raking out joints of walls, celings etc. upto any height and in any floor including removing rubbish within a lead of 75m as directed	sqm	119	100	11900
	Add 12 % GST			A	65867.24
				B	7904.06
					73771.3
	Add 1% Labour Cess			C	737.713
				Total	74509.01

Name & Address of the Agency :

Rate Quoted by Agency :

Signature & Seal of Agency :

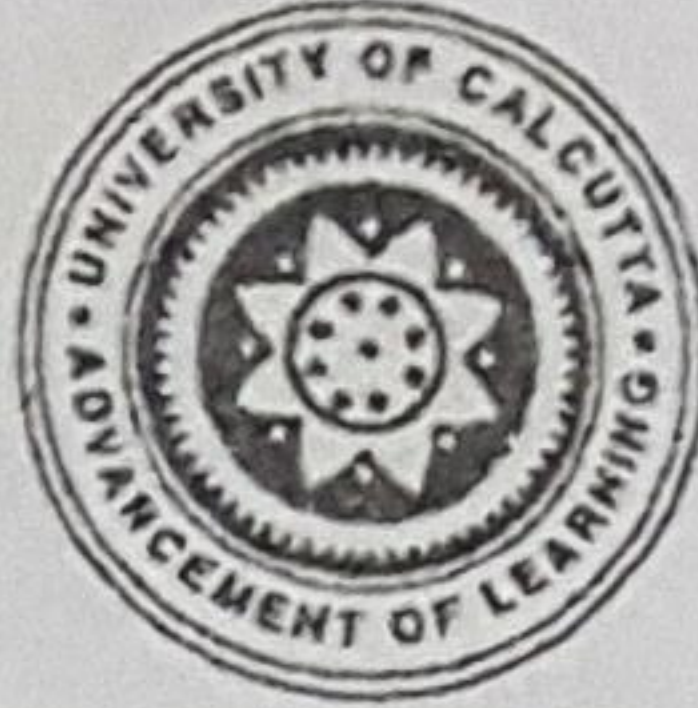

UNIVERSITY OF CALCUTTA
OFFICE OF THE UNIVERSITY ENGINEER
87/1 College Street
Darbhanga Building, Ground Floor
Kolkata-700073
Website :-www.caluniv.ac.in

NOTICE INVITING TENDER


University of Calcutta invites **sealed** tender from resourceful and bonafide contractors for the following work

1.	N.I.T. No	:	Eng /CT-280/18-19. Dated 18/ 01/ 2019
2.	Name of Work	:	ESTIMATE FOR SOME CIVIL WORKS IN ROOM NO 341A FOR DR SUDIPTORAY OF BOTANY DEPARTMENT AS PER PWD SCHEDULE 2017
3.	Estimated Cost put to Tender	:-	RS 187858/-
4.	Earnest Money	:	A sum of Rs 9400/- (Rupees Nine thousand and four hundred only)in the form of CTS demand draft in favour of University of Calcutta payable at Kolkata is to be attached with the Tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenders on application after issuing of work order to the successful bidder. In case of sucessful tender the EMD will be returned on application after an equal amount of security deposit is ducted by the University from the running bills.
5.	Time of completion	:	45days
6.	Eligibility Criteria	:	Valid trade License , GST & Pan and credential for satisfactory completion of similar nature of job. Amounting 75 % of the estimated value in a single tender in the last three financial year . Government, Government Undertaking and University of Calcutta credentials are accepted.(only completion certificate of the work should be treated as Credential.
7.	Last date of receipt of application f or tender	:	NA
8.	Last date of Sale/ issue of tender papers	:	TO BE DOWNLOADED FROM WEBSITE.(www. caluniv.ac.in)
9.	Last Date and Time of tender Submission	:	31/01/2019.(up to 2.00 PM)
10.	Date and Time of Tender Opening	:	On or after 3:00 PM 31/01/2019

N.I.T no ,Name of work and the date of opening should be written on the sealed envelope otherwise tender will not be opened thus cancelled.

The undersigned reserves the right to reject any or all Tenders without assigning any reason what so ever.

18/1/19
University Engineer C.U.

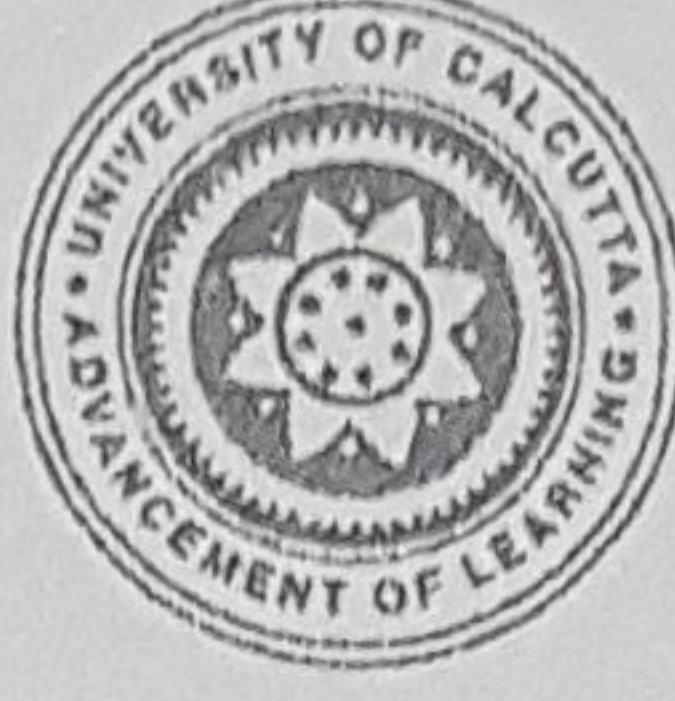

UNIVERSITY OF CALCUTTA

Name of the work:- ESTIMATE FOR SOME CIVIL WORKS IN ROOM NO 341A FOR DR SUDIPTORAY OF BOTANY DEPARTMENT AS PER PWD SCHEDULE 2017

N. I.T. no- Eng /CT-280/18-19. **Dated** 18/01/2019

Estimated cost Put to Tender:- RS 187858/-

Name of Agency:-

Address of Agency:-

Rate quoted by Agency:- (%)
Percent Above / At par / Below

Signature of the Agency with date & stamp:-



UNIVERSITY OF CALCUTTA

N. I.T. no- Eng /CT-280/18-19. Dated 18/ 01/ 2019

TENDER AND CONTRACT FOR WORK

GENERAL TERMS AND DIRECTION FOR THE GUIDANCE OF CONTRACT

1. Eligible Tenders will have to download the tender papers from the website & drop the filled tender papers signed with seal and date at every page along with copy of Valid Trade license's, GST & PAN and Credential for satisfactory completion of similar nature of job amounting to at least seventy five percent of the job value in a single tender from any Government, Govt. undertaking or University of Calcutta in the last three financial year in sealed envelope in the Tender box kept in the Office of the undersigned with in the specified time mentioned in the NIT. which will be opened by the undersigned or by his representative with in **the specified time and date mentioned in the NIT.** The tendered must write the name of the work , NIT no , the date of opening and name of **the bidder on the envelop failing which the tender will not be opened thus will be treated as cancelled.**
2. The rate should be quoted after inspection of the site and inclusive of all incidental charges i.e. freight, insurances, labour insurances, handling charges, necessary government taxes, duties etc as well as the Water, Electricity charges which are to be paid as per rules .
3. The contractor shall be responsible to ensure compliance with the provision of minimum wages act 1948 as modified up to date and the rules made in respect of any employees, employed by the contractor directly or through the petty or subcontractor for the purpose of carrying this contract. The contractor shall be responsible for any damage, injury or loss caused by the work or workmen to any person, animal or material during the progress of work.
4. Liquidated damage will be charged to the contractor if they fail to complete the work within the stipulated time, 0.01% per day to a maximum limit of 05 % of the contract value .



5. The allotted time for completion of the work 45 days from the date of receipt of work order. Time is the essence of this contract. Normally no time extension will be granted. In case of prayer for extension of time the University authority has the full right reserved to grant it or discard it.

6. (a) If the successful contractor's bid rate is 80% or less than the estimated amount put to tender the contractor will have to submit a Bank Guarantee amounting to 10% of the Tendered amount before issue of Work order failing which the EMD will be forfeited and the agency may be blacklisted. The Bank Guarantee should be valid till the end of the contract period and shall be renewed accordingly if required. This bank Guarantee is an Additional Performance Security. So provision of deducting Security deposit from bills will hold goods per relevant clause of the contract. The bank Guarantee shall be returned immediately on successful completion of contract.

(b) The University authority will retain a sum amounting to 10% of the bill of the contract for a period of six months from the date of completion of work as **Security Deposit**. Which will be released after a period of six months from the date of completion of the work on application.

7. A sum of 5% of the estimated amount i.e. value as mentioned in the NIT. in the form of demand draft in favour of UNIVERSITY OF CALCUTTA payable at Kolkata is to be attached with the tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenderers on application after issue of work order to the successful bidder. For successful tenderer the EMD will be returned on application after an equal amount of security deposit is deducted from the running bills.


Amount:- Rs

D.D No..... Dated / /20

Name of Issuing Bank:--

B ranch :-

8. Work is to be carried out as per specification laid in the B.O.Q or PWD specification as per instruction of the University Engineer or his representative.

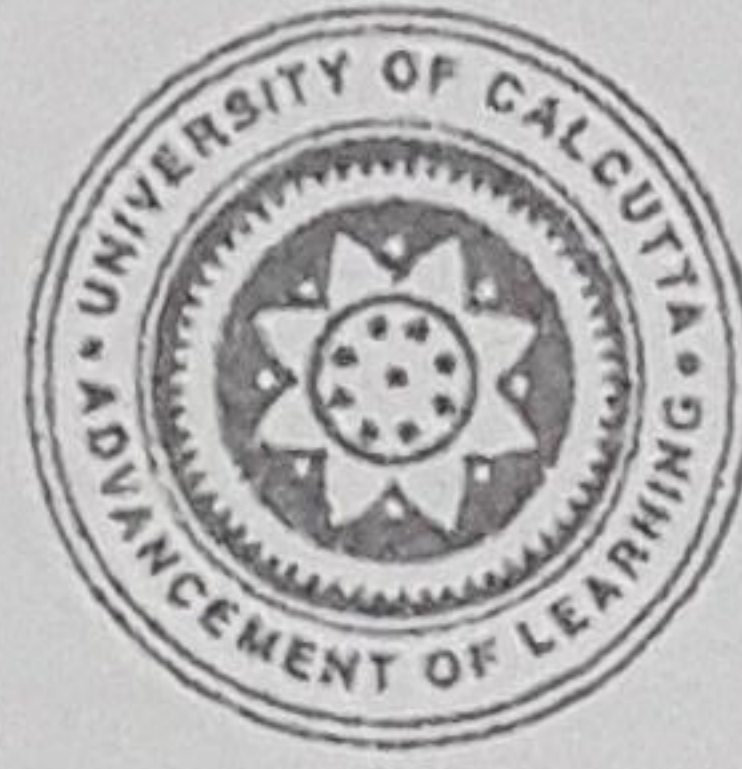

9. The materials brought to site for execution of the work should by no means be taken out of site without the permission of the Engineer C.U.

10. The rates must be quoted in words in figure other wise the tender will be cancelled.

11. The University will not be bound to accept the lowest bidder.

12. The University will not supply any materials to the contractor.

13. The contractor will work under the strict supervision of the Engineer/ Sub-Assistant Engineer. The estimate given along with the tender are provisional payment will be made on the actual work done jointly measured by the Engineer or his representative (Sub-Assistant Engineer) & the contractor or his representative. The contractor will have to submit bill in printed format in duplicate .

14. The contractor will have to take necessary instruction from the Engineer CU/ Sub-Assistant Engineer regarding the execution of work.

15. Defect & liability Period :- The defect & liability period will be for a period of six months from the date of completion of the job. Any defects pointed out during this period has to be mend good by the agency at their own cost failing which the retention money will be forfeited.

Sd/-

University Engineer

Name of the Agency:

Address :-

SIGNATURE OF THE CONTRACTOR WITH SEAL AND DATE

PRICE SCHEDULE FOR SOME CIVIL WORKS IN ROOM NO 341A FOR DR SUDIPTO RAY OF BOTANY DEPARTMENT AS PER PWD SCHEDULE 2017

SL NO	DESCRIPTION	UNIT	RATE	QTY	AMOUNT
1	Supplying and laying approved make and brand scratchproof, flexible and homogenous...PVC vinyle flooring 2mm thick 7.6x3.25=24.7 lt 1 / Pg 76/315	sqm	508	26	13208
2	Supplying fitting and fixing water proof ply...as per approval of Engg in Xcharge 19mm ply lt 2 /Pg 173/315	sqm	2420	12	29040
	6mm ply	sqm	1122	8	8976
3	Supplying fitting and fixing water proof decorative lamination as per approved make and brand... grnd floor thickness 1.5mm lt 14/ Pg 178/315	sqm	802	32	25664
4	Supplying profiles of required section made of Aluminium Alloy Extrusions conforming to IS: 732-1983 and IS: 1285- 1975; Annodized (with required film thickness and specified colour / natural) matt finished conforming to IS: 1868-1983 for fabrication of composit door, sliding & casement windows, partitions, formed of basic sections of any ISI embossed / certified make and brand as per direction of Engineer - In- Charge. (Payment will be made on finished length of the work). II) Coloured lt 1/Pg 238/315 Fixed partitions. (Unsupported length of vertical member upto 1.5 mtr. Height of both ends of vertical member restrained but panels within 0.9 Top, bottom & side member. 3.23x2x2+3.5x2x2= 26.92m Intermediate Member 3.23x2x2= 12.92m Glazing Clip (28+14)x2 =84	m	488	28	13664
		m	508	14	7112
		m	50	84	4200
5	Labour charge for fabrication and installation of composite door, window, partitions made from annodized extruded alloy aluminium sections for the following units:- (D) Partly glazed and partly panelled partition or fixed glazing made of extruded and anodised alloy aluminium sections, fabrications after cutting to proper shape and size, drilling and aligning fitted with inbuilt				

locking arrangement cutting the glass / board (prelaminated / particle / block) to requisite shape and size moulding the edges fitted and fixed glazing clips and dry set neoprene /EPDM gasket, along with all other necessary arrangements for fixing the partition to walls, floors, beams, columns polysulphide sealant for water proofing if necessary complete in all respect as per drawing and specifications and direction of the Engineer in charge.

	b) 101.50mm x 44.45 mm				
	3.23x3.5x2=22.61x2 =45.22	sqm	890	46	40940
6	Supplying bubble free float glass of approved make and brand conforming to IS: 2835-1987.				
	4mm thick coloured / tinted / smoke glass	sqm	468	7.75	3627
	lt9/Pg 243/315				
	1.2x3.23x2=7.75				
7	(b) Priming one coat on timber or plastered surface with synthetic oil bound primer of approved quality including smoothening surfaces by sand papering etc.	sqm	38	90	3420
	7.6x3.25=24.7				
	(7.6+3.25)x2x3.3=71.61				
	less w/D 2.1x1.2x2x2=-10.8 Total 88				
8	Painting with best quality synthetic enamel paint of approved make and brand including smoothening surface by sand papering etc. including using of approved putty etc. on the surface, if necessary :				
	(a) On timber or plastered surface				
	10.8 sqm	sqm	81	12	972
9	Priming one coat on steel or other metal surface with synthetic oil bound primer of approved quality including smoothening surfaces by sand papering etc.	sqm	29	12	348
10	Rendering the surface of walls and ceiling with white cement based wall putty of approved make and brand(1.5mm thick)	sqm	110	45	4950
	0.5x90=45sqm				
11	a)Cleaning the walls and ceiling by scraping, sand papering and smoothening down the surface including putting	sqm	17	110	1870
12	Removing old paint from blistered painted surface of steel or other metal by chipping including scraping and cleaning and exposing the original surface.	sqm	47	110	5170
13	125 mm. thick brick work with 1st class bricks in cement mortar (1:4) in ground floor 2.1x1.2= 2.52	sqm	724	3	2172
14	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course, scaffolding/staging where necessary (Ground floor).[Excluding cost of chipping over concrete surface It 1 Pg 189/315	sqm	167	6	1002
	With 1:6 mortar 20mm thick				166335
	Total Basic Cost A			A	166335
	Add 12 % GST (Subject to verification of Accounts Dept 12 % of A)			B	19660
	Add 1% Labour Welfare Cess on (A+B)			C	<u>1863</u>

Name & Address of the Agency :

TOTAL

187858

Rate Quoted by Agency :

Signature & Seal of Agency :



UNIVERSITY OF CALCUTTA
OFFICE OF THE UNIVERSITY ENGINEER
87/1 College Street
Darbhanga Building, Ground Floor
Kolkata-700073
Website :-www.caluniv.ac.in

NOTICE INVITING TENDER

University of Calcutta invites **sealed** tender from resourceful and bonafide contractors for the following work

1.	N.I.T. No	:	Eng /CT-281/18-19. Dated 01/01/2019
2.	Name of Work	:	REPAIRING PAINTING OF SOME ROOMS OF PURE MATHS OF BALLYGUNJES COLLEGE AS PER PWD SCHEDULE 2017
3.	Estimated Cost put to Tender	:-	Rs312880/-
4.	Earnest Money	:	A sum of Rs 15650/- (Rupees Fifteen thousand six hundred and fifty only)in the form of CTS demand draft in favour of University of Calcutta payable at Kolkata is to be attached with the Tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenders on application after issuing of work order to the successful bidder. In case of successful tender the EMD will be returned on application after an equal amount of security deposit is ducted by the University from the running bills.
5.	Time of completion	:	45days
6.	Eligibility Criteria	:	Valid trade License , GST & Pan and credential for satisfactory completion of similar nature of job. Amounting 75 % of the estimated value in a single tender in the last three financial year . Government, Government Undertaking and University of Calcutta credentials are accepted.(only completion certificate of the work should be treated as Credential.
7.	Last date of receipt of application for tender	:	NA
8.	Last date of Sale/ issue of tender papers	:	TO BE DOWNLOADED FROM WEBSITE.(www. caluniv.ac.in)
9.	Last Date and Time of tender Submission	:	31/01/2019.(up to 2.00 PM)
10.	Date and Time of Tender Opening	:	On or after 3:00 PM 31/01/2019

N.I.T no ,Name of work and the date of opening should be written on the sealed envelope otherwise tender will not be opened thus cancelled.

The undersigned reserves the right to reject any or all Tenders without assigning any reason what so ever.

University Engineer C.U.



UNIVERSITY OF CALCUTTA

Name of the work:- REPAIRING PAINTING OF SOME ROOMS OF PURE MATHS OF BALLYGUNDESC COLLEGE AS PER PWD SCHEDULE 2017

N. I.T. no- Eng /CT-281/18-19. Dated 18/01/ 2019

Estimated cost Put to Tender:- Rs312880/-

Name of Agency:-

Address of Agency:-

Rate quoted by Agency:- (%)
Percent Above / At par / Below

Signature of the Agency with date & stamp:-



UNIVERSITY OF CALCUTTA

N. I.T. no- Eng /CT-281/18-19. Dated 18/ 01/ 2019

TENDER AND CONTRACT FOR WORK

GENERAL TERMS AND DIRECTION FOR THE GUIDANCE OF CONTRACT

1. Eligible Tenders will have to download the tender papers from the website & drop the filled tender papers signed with seal and date at every page along with copy of Valid Trade license's, GST & PAN and Credential for satisfactory completion of similar nature of job amounting to at least seventy five percent of the job value in a single tender from any Government, Govt. undertaking or University of Calcutta in the last three financial year in sealed envelope in the Tender box kept in the Office of the undersigned with in the specified time mentioned in the NIT. which will be opened by the undersigned or by his representative with in **the specified time and date mentioned in the NIT.** The tendered must write the name of the work , NIT no , the date of opening and name of the bidder on the envelop failing which the tender will not be opened thus will be treated as cancelled.
2. The rate should be quoted after inspection of the site and inclusive of all incidental charges i.e. freight, insurances, labour insurances, handling charges, necessary government taxes, duties etc as well as the Water, Electricity charges which are to be paid as per rules .
3. The contractor shall be responsible to ensure compliance with the provision of minimum wages act 1948 as modified up to date and the rules made in respect of any employees, employed by the contractor directly or through the petty or subcontractor for the purpose of carrying this contract. The contractor shall be responsible for any damage, injury or loss caused by the work or workmen to any person, animal or material during the progress of work.
4. Liquidated damage will be charged to the contractor if they fail to complete the work within the stipulated time, 0.01% per day to a maximum limit of 05 % of the contract value .



5. The allotted time for completion of the work 45 days from the date of receipt of work order. Time is the essence of this contract. Normally no time extension will be granted. In case of prayer for extension of time the University authority has the full right reserved to grant it or discard it.

6. (a) If the successful contractor's bid rate is 80% or less than the estimated amount put to tender the contractor will have to submit a Bank Guarantee amounting to 10% of the Tendered amount before issue of Work order failing which the EMD will be forfeited and the agency may be blacklisted. The Bank Guarantee should be valid till the end of the contract period and shall be renewed accordingly if required. This bank Guarantee is an Additional Performance Security. So provision of deducting Security deposit from bills will hold goods per relevant clause of the contract. The bank Gurrantee shall be returned immediately on successful completion of contract.

(b) The University authority will retain a sum amounting to 10% of the bill of the contract for a period of six months from the date of completion of work as **Security Deposit**. Which will be released after a period of six months from the date of completion of the work on application.

7. A sum of 5% of the estimated amount i.e value as mentioned in the NIT. in the form of demand draft in favour of UNIVERSITY OF CALCUTTA payable at Kolkata is to be attached with the tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenderers on application after issue of work order to the successful bidder. For successful tenderer the EMD will be returned on application after an equal amount of security deposit is deducted from the running bills.

Amount:- Rs

D.D No..... Dated / /20

Name of Issuing Bank:--

B ranch :-

8. Work is to be carried out as per specification laid in the B.O.Q or PWD specification as per instruction of the University Engineer or his representative.



9. The materials brought to site for execution of the work should by no means be taken out of site without the permission of the Engineer C.U.

10. The rates must be quoted in words in figure other wise the tender will be cancelled.

11. The University will not be bound to accept the lowest bidder.

12. The University will not supply any materials to the contractor.

13. The contractor will work under the strict supervision of the Engineer/ Sub-Assistant Engineer. The estimate given along with the tender are provisional payment will be made on the actual work done jointly measured by the Engineer or his representative(Sub-Assistant Engineer) & the contractor or his representative. The contractor will have to submit bill in printed format in duplicate .

14. The contractor will have to take necessary instruction from the Engineer CU/ Sub-Assistant Engineer regarding the execution of work.

15. Defect & liability Period :- The defect & liability period will be for a period of six months from the date of completion of the job. Any defects pointed out during this period has to be mend good by the agency at their own cost failing which the retention money will be forfeited.

Sd/-

University Engineer

Name of the Agency:


Address :-

SIGNATURE OF THE CONTRACTOR WITH SEAL AND DATE

**PRICE SCHEDULE FOR REPAIRING PAINTING OF SOME ROOMS
PURE MATHEMATICS DEPARTMENT AS PER PWD SCHEDULE 2017**

SL NO	DESCRIPTION	UNIT	RATE	QTY	AMOUNT
1	Stripping off worn out plaster and raking out joints of walls, ceiling etc as directed	Sqm	19	224.96	4274.24
2	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course, scaffolding/staging where necessary (Ground floor).[Excluding cost of chipping over concrete surface] (i) With 1:6 cement mortar (a) 20 mm thick plaster	Sqm	167	224.96	37568.32
3	Dismantling R.C. floor, roof, beams etc. including cutting rods and removing rubbish as directed within a lead of 75 m. including stacking of steel bars. (a) In ground floor including roof. 224.96x.4x.05= 4.5	cum	1956	4.5	8802
4	Removal of rubbish,earth etc. from the working site and disposal of the same beyond the compound, in conformity with the Municipal / Corporation Rules for such disposal, loading into truck and cleaning the site in all respect as per direction of Engineer in charge	cum	166	11.22	1862.52
5	Cement concrete (1:1.5:3) with graded stone chips 5.6 mm size with hexagonal square mesh wire netting, I.R.C. fabric mesh or X.P. M. fitted and fixed after tying the existing reinforcement on concrete without distributing the same and with proper scarping and cleaning the reinforcement and disturbed concrete with wire brush etc. after applying a coat of cement including the cost of wire netting I.R.C or X. P. M. & cost of all handling and scaffolding complete as per direction of Engineer-in -charge. 20mm thick 6.96	cum	488	4.5	2196
6	Applying epoxy based reactive joining agent for joining the old concrete with fresh concrete to be applied within manufacturer's specified time as per manufacturers specification. (0.4 Kg / m ² of concrete surface). .4x37.64	Sqm	309	90	27810
7	Priming one coat on timber or plastered surface with synthetic oil bound primer of approved quality including smoothening surfaces by sand papering etc.	sqm	38	1150	43700
8	Removing old paint from blistered painted surface with application of soda, sajimati or any approved chemical paint remover and exposing the original surface including cleaning and thorough washing to remove all traces of the removing agent including taking out shutters and refixing the same where necessary	sqm	39	930	36270
9	Synthetic Distemper to interior wall, ceiling with a coat of solvent based interior grade acrylic primer (as per manufacturer's specification) including cleaning and smoothening of surface. Two Coats	sqm	68	1150	78200
10	Painting with best quality synthetic enamel paint of approved make				

• and brand including smoothening surface by sand papering etc. including using of approved putty etc. on the surface, if necessary :				
Two coats (with any shade except white)	sqm	81	184	14904
(56+36)x2= 184				
11 Supplying fitting fixing white vitreous china sink app make & brand ...with pillar cock two coats paint It2 Pg 41/124 550x400	nos	2208	3	6624
12 Supplying fitting fixing GI pipes of TATA make with all accessories , specials IT 1 Pg 2/124 5.5x3= 16.5 25mm dia medium quality	metre	267	16.5	4405.5
13 Supplying fitting fixing Peets Valve full way gunmetal best quality It 4 /Pg4 /124 25mm dia	nos	912	3	2736
14 Supplying fitting fixing Chromium plated Stop Cock ESSCo It 7b / Pg 6/124	nos	493	3	1479
15 Supplying fitting fixing PVC pipes of approved make & brand incuding all specials For Exposed work 50mm dia	metre	384	15	5760
			A	276591.58
Add 12 % GST on A			B	33190.99
				309782.57
Add 1% Labour Cess			C	3097.8257
				312880.4
			Total	312880
				312880

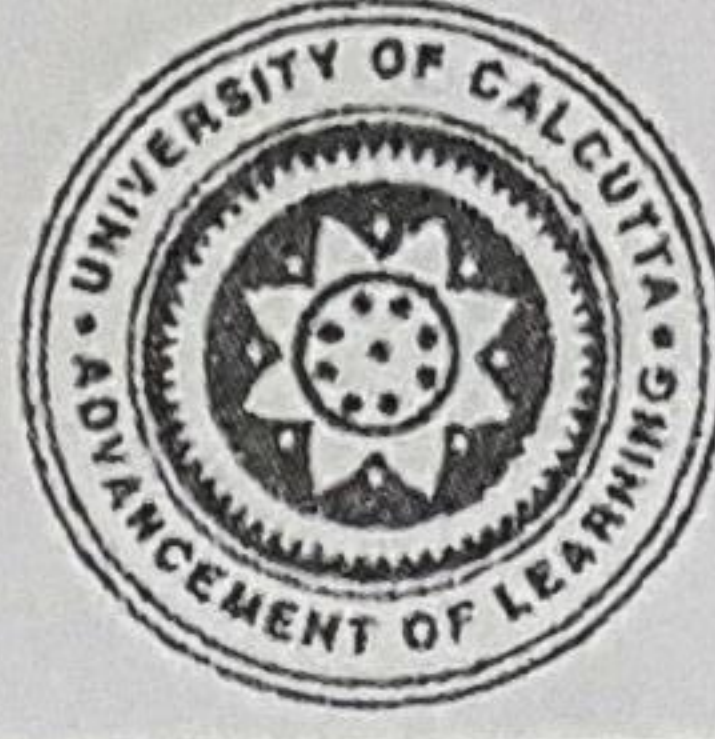

UNIVERSITY OF CALCUTTA
OFFICE OF THE UNIVERSITY ENGINEER
87/1 College Street
Darbhanga Building, Ground Floor
Kolkata-700073
Website :-www.caluniv.ac.in


NOTICE INVITING TENDER


University of Calcutta invites **sealed** tender from resourceful and bonafide contractors for the following work

1.	N.I.T. No	:	Eng /CT-282/18-19. Dated 19/ 01/ 2019
2.	Name of Work	:	REPAIRING OF DOORS AT PURE MATHEMATICS DEPARTMENT AS PER PWD SCHEDULE 2017
3.	Estimated Cost put to Tender	:-	Rs24128/-
4.	Earnest Money	:	A sum of Rs 1200/- (Rupees one thousand two hundred only)in the form of CTS demand draft in favour of University of Calcutta payable at Kolkata is to be attached with the Tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenders on application after issuing of work order to the successful bidder. In case of successful tender the EMD will be returned on application after an equal amount of security deposit is deducted by the University from the running bills.
5.	Time of completion	:	45days
6.	Eligibility Criteria	:	Valid trade License , GST & Pan and credential for satisfactory completion of similar nature of job. Amounting 75 % of the estimated value in a single tender in the last three financial year . Government, Government Undertaking and University of Calcutta credentials are accepted.(only completion certificate of the work should be treated as Credential.
7.	Last date of receipt of application for tender	:	NA
8.	Last date of Sale/ issue of tender papers	:	TO BE DOWNLOADED FROM WEBSITE.(www. caluniv.ac.in)
9.	Last Date and Time of tender Submission	:	31/01/2019.(up to 2.00 PM)
10.	Date and Time of Tender Opening	:	On or after 3:00 PM 31/01/2019

N.I.T no ,Name of work and the date of opening should be written on the sealed envelope otherwise tender will not be opened thus cancelled.

The undersigned reserves the right to reject any or all Tenders without assigning any reason what so ever.

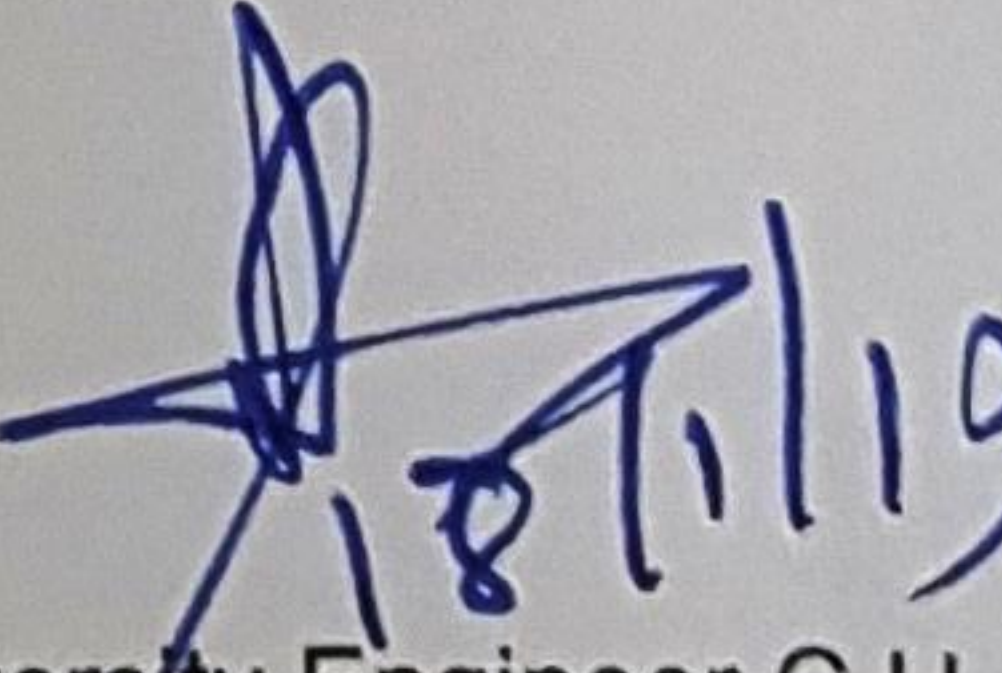
University Engineer C.U.

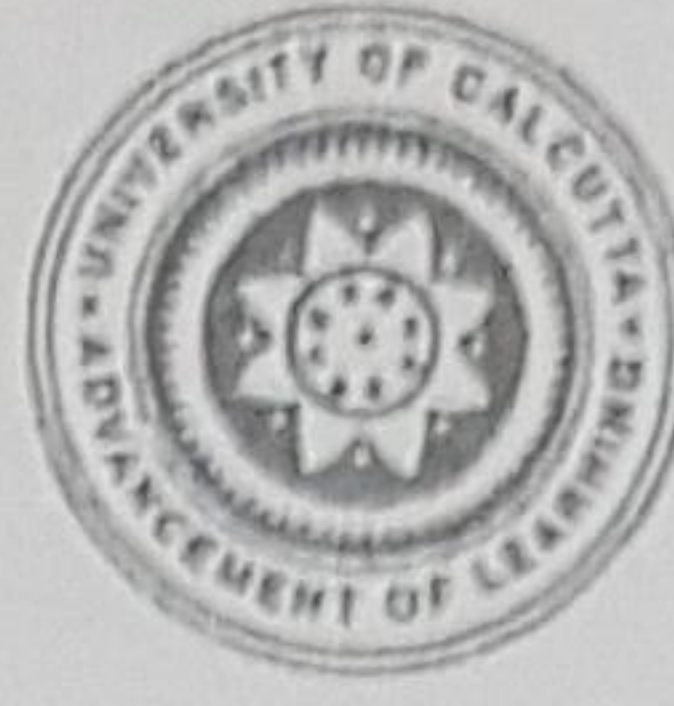

UNIVERSITY OF CALCUTTA

Name of the work:- REPAIRING PAINTING OF SOME ROOMS OF PURE MATHS OF BALLYGUNDESC COLLEGE AS PER PWD SCHEDULE 2017

N. I.T. no- Eng /CT-282/18-19. Dated 18/ 01/ 2019


Estimated cost Put to Tender:- Rs312880/-

Name of Agency:-

Address of Agency:-

Rate quoted by Agency:- (%)
Percent Above / At par / Below

Signature of the Agency with date & stamp:-

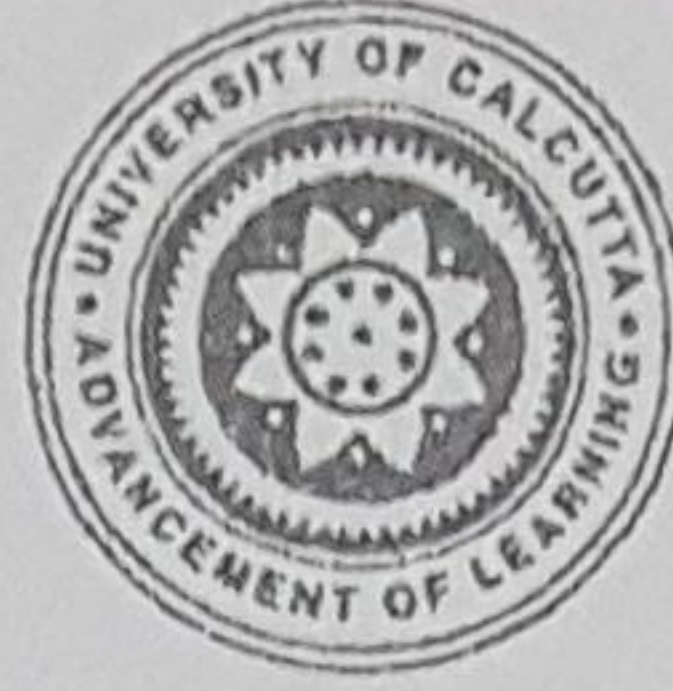

UNIVERSITY OF CALCUTTA

N. I.T. no- Eng /CT-282/18-19. Dated 13/ 01/ 2019

TENDER AND CONTRACT FOR WORK

GENERAL TERMS AND DIRECTION FOR THE GUIDANCE OF CONTRACT

1. Eligible Tenders will have to download the tender papers from the website & drop the filled tender papers signed with seal and date at every page along with copy of Valid Trade license's, GST & PAN and Credential for satisfactory completion of similar nature of job amounting to at least seventy five percent of the job value in a single tender from any Government, Govt. undertaking or University of Calcutta in the last three financial year in sealed envelope in the Tender box kept in the Office of the undersigned with in the specified time mentioned in the NIT. which will be opened by the undersigned or by his representative with in **the specified time and date mentioned in the NIT.** The tendered must write the name of the work , NIT no , the date of opening and name of the bidder on the envelop failing which the tender will not be opened thus will be treated as cancelled.
2. The rate should be quoted after inspection of the site and inclusive of all incidental charges i.e. freight, insurances, labour insurances, handling charges, necessary government taxes, duties etc as well as the Water, Electricity charges which are to be paid as per rules .
3. The contractor shall be responsible to ensure compliance with the provision of minimum wages act 1948 as modified up to date and the rules made in respect of any employees, employed by the contractor directly or through the petty or subcontractor for the purpose of carrying this contract. The contractor shall be responsible for any damage, injury or loss caused by the work or workmen to any person, animal or material during the progress of work.
4. Liquidated damage will be charged to the contractor if they fail to complete the work within the stipulated time, 0.01% per day to a maximum limit of 05 % of the contract value .



5. The allotted time for completion of the work 45 days from the date of receipt of work order .Time is the essence of this contract. Normally no time extension will be granted. In case of prayer for extension of time the University authority has the full right reserved to grant it or discard it.

6. (a) If the successful contractor's bid rate is 80% or less than the estimated amount put to tender the contractor will have to submit a Bank Guarantee amounting to 10% of the Tendered amount before issue of Work order failing which the EMD will be forfeited and the agency may be blacklisted. The Bank Guarantee should be valid till the end of the contract period and shall be renewed accordingly if required. This bank Guarantee is an Additional Performance Security .So provision of deducting Security deposit from bills will hold goods per relevant clause of the contract. The bank Gurrantee shall be returned immediately on successful completion of contract.

(b) The University authority will retain a sum amounting to 10% of the bill of the contract for a period of six months from the date of completion of work as **Security Deposit**. Which will be released after a period of six months from the date of completion of the work on application.

7. A sum of 5% of the estimated amount i.e value as mentioned in the NIT. in the form of demand draft in favour of UNIVERSITYOF CALCUTTA payable at Kolkata is to be attached with the tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenderers on application after issue of work order to the successful bidder. For successful tenderer the EMD will be returned on application after an equal amount of security deposit is deducted from the running bills.


Amount:- Rs

D.D No..... Dated / /20

Name of Issuing Bank:--

B ranch :-

8. Work is to be carried out as per specification laid in the B.O.Q or PWD specification as per instruction of the University Engineer or his representative.

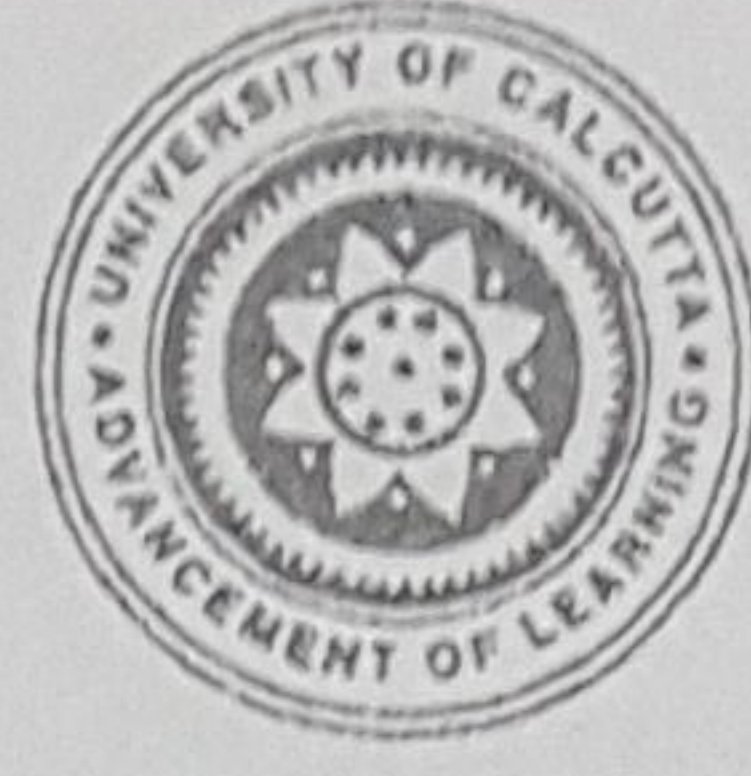

9. The materials brought to site for execution of the work should by no means be taken out of site without the permission of the Engineer C.U.

10. The rates must be quoted in words in figure other wise the tender will be cancelled.

11. The University will not be bound to accept the lowest bidder.

12. The University will not supply any materials to the contractor.

13. The contractor will work under the strict supervision of the Engineer/ Sub-Assistant Engineer. The estimate given along with the tender are provisional payment will be made on the actual work done jointly measured by the Engineer or his representative (Sub-Assistant Engineer) & the contractor or his representative. The contractor will have to submit bill in printed format in duplicate .

14. The contractor will have to take necessary instruction from the Engineer CU/ Sub-Assistant Engineer regarding the execution of work.

15. Defect & liability Period :- The defect & liability period will be for a period of six months from the date of completion of the job. Any defects pointed out during this period has to be mend good by the agency at their own cost failing which the retention money will be forfeited.

Sd/-

University Engineer

Name of the Agency:

Address :-

SIGNATURE OF THE CONTRACTOR WITH SEAL AND DATE

PRICE SCHEDULE FOR REPAIRING OF DOOR AT PURE MATHEMATICS DEPARTMENT AS PER PWD SCHEDULE 2017

SL NO	DESCRIPTION	UNIT	RATE	QTY	AMOUNT
1 IT 30B /PG 152	Labour for taking out door & window frame including shutter ...refixing the same mending good damages 2x2.1x1.2=5.04	sqm	146	5.04	735.84
2 It1e/pg 114	Wood work in door window frame fitted & fixed excluding costs of iron hinges 8.4x.125x.075=.078	cum	83218	0.078	6491.004
3 It 11e pg 124	Supplying solid flush type doors ...including fitting fixing shutters ...32mm thick Commercial quality 2.5x1.2=3sqm	sqm	2359	3	7077
4 It 1/pg 114	Lifting charge for 7th floor for wood work and flush type work i) Rs. 200/- per Cu.m (upto 4th floor) ii) Rs.250/-(above 4th floor)	cum	200 250	0.078 0.078	15.6 19.5
5 It 5/pg 140	Iron butt hinges of approved quality fitted and fixed with steel screws, with ISI mark. (vi) 100mm. X 50mm. X 1.25mm.	nos	43	6	258
6 It 10c Pg141	Iron hasp bolt of approved quality fitted and fixed complete (oxidised) with 16mm dia rod with centre bolt and round fitting. 300mm long.	nos	166	2	332
7 It 19 Pg 143	(ii) Door stopper (Anodised aluminium)	nos	70	4	280
8 It 26/ Pg 144	Anodised Aluminium tower bolt 200mm	nos	78	2	156
9 It ii Pg 146	Anodised aluminium grip handle with base plate of approved quality fitted and fixed complete 225mm grip x 16mm dia rod x 38mm plate x 3.2mm thick.	nos	177	4	708
10 It 4A Pg 140	Supplying, fitting and fixing M.S. clamps for door and window frame made of flat bent bar, end bifurcated with necessary screws etc. by cement concrete(1:2:4) as per direction. (Cost of concrete will be paid separately)	nos	25	6	150
11	b) 40mm X 6mm, 200mm Length Ordinary Cement concrete (mix 1:1.5:3) with graded stone chips (20 mm				

	nominal size) excluding shuttering and reinforcement if any, in ground floor	cum	4482	0.5	2241
12	Priming one coat on steel or other metal surface with synthetic oil				
It1 b Pg 200	bound primer of approved quality including smoothening surfaces by sand papering etc	sqm	38	10	380
13	Painting with best quality synthetic enamel paint of approved make				
It 2/Pg 200	and brand including smoothening surface by sand papering etc. including using of approved putty etc. on the surface, if necessary	sqm	81	10	810
14	Supplying best indian glass panes 4mm thick	sqm	838	2	1676
					21329.94
	Add 12% GST				2559.593
					23889.54
	Add 1% Labour Cess				238.8954
					24128.43
					24128
			Total		



UNIVERSITY OF CALCUTTA
OFFICE OF THE UNIVERSITY ENGINEER
87/1 College Street
Darbhanga Building, Ground Floor
Kolkata-700073
Website :-www.caluniv.ac.in

NOTICE INVITING TENDER

University of Calcutta invites sealed tender from resourceful and bonafide contractors for the following work

1.	N.I.T. No	:	Eng /CT-283/18-19. Dated 18/ 01/ 2019
2.	Name of Work	:	REPAIRING OF SURFACE DRAIN & COVERING DRAIN AT HIRANMAYEE CHHATRI BHAVAN EASTERN SIDE AS PER PWD SCHEDULE 2017
3.	Estimated Cost put to Tender	:-	Rs61856/-
4.	Earnest Money	:	A sum of Rs 3100/- (Rupees Three thousand & one hundred only)in the form of CTS demand draft in favour of University of Calcutta payable at Kolkata is to be attached with the Tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenders on application after issuing of work order to the successful bidder. In case of sucessful tender the EMD will be returned on application after an equal amount of security deposit is ducted by the University from the running bills.
5.	Time of completion	:	45days
6.	Eligibility Criteria	:	Valid trade License , GST & Pan and credential for satisfactory completion of similar nature of job. Amounting 75 % of the estimated value in a single tender in the last three financial year . Government, Government Undertaking and University of Calcutta credentials are accepted.(only completion certificate of the work should be treated as Credential.
7.	Last date of receipt of application f or tender	:	NA
8.	Last date of Sale/ issue of tender papers	:	TO BE DOWNLOADED FROM WEBSITE.(www. caluniv.ac.in)
9.	Last Date and Time of tender Submission	:	31/01/2019.(up to 2.00 PM)
10.	Date and Time of Tender Opening	:	On or after 3:00 PM 31/01/2019

N.I.T no ,Name of work and the date of opening should be written on the sealed envelope otherwise tender will not be opened thus cancelled.

The undersigned reserves the right to reject any or all Tenders without assigning any reason what so ever.

University Engineer C.U.



UNIVERSITY OF CALCUTTA

Name of the work:- REPAIRING OF SURFACE DRAIN & COVERING DRAIN AT HIRANMAYEE CHHATRI BHAVAN EASTERN SIDE AS PER PWD SCHEDULE 2017

N. I.T. no- Eng /CT-283/18-19. Dated 18/ 01/ 2019

Estimated cost Put to Tender:- Rs61856/-

Name of Agency:-

Address of Agency:-

Rate quoted by Agency:- (%)
Percent Above / At par / Below

Signature of the Agency with date & stamp:-




UNIVERSITY OF CALCUTTA

N. I.T. no- Eng /CT-283/18-19. Dated 18/ 01/ 2019

TENDER AND CONTRACT FOR WORK

GENERAL TERMS AND DIRECTION FOR THE GUIDANCE OF CONTRACT

1. Eligible Tenders will have to download the tender papers from the website & drop the filled tender papers signed with seal and date at every page along with copy of Valid Trade license's, GST & PAN and Credential for satisfactory completion of similar nature of job amounting to at least seventy five percent of the job value in a single tender from any Government, Govt. undertaking or University of Calcutta in the last three financial year in sealed envelope in the Tender box kept in the Office of the undersigned with in the specified time mentioned in the NIT. which will be opened by the undersigned or by his representative with in **the specified time and date mentioned in the NIT.** The tendered must write the name of the work , NIT no , the date of opening and name of the bidder on the envelop failing which the tender will not be opened thus will be treated as cancelled.
2. The rate should be quoted after inspection of the site and inclusive of all incidental charges i.e. freight, insurances, labour insurances, handling charges, necessary government taxes, duties etc as well as the Water, Electricity charges which are to be paid as per rules .
3. The contractor shall be responsible to ensure compliance with the provision of minimum wages act 1948 as modified up to date and the rules made in respect of any employees, employed by the contractor directly or through the petty or subcontractor for the purpose of carrying this contract. The contractor shall be responsible for any damage, injury or loss caused by the work or workmen to any person, animal or material during the progress of work.
4. Liquidated damage will be charged to the contractor if they fail to complete the work within the stipulated time, 0.01% per day to a maximum limit of 05 % of the contract value .

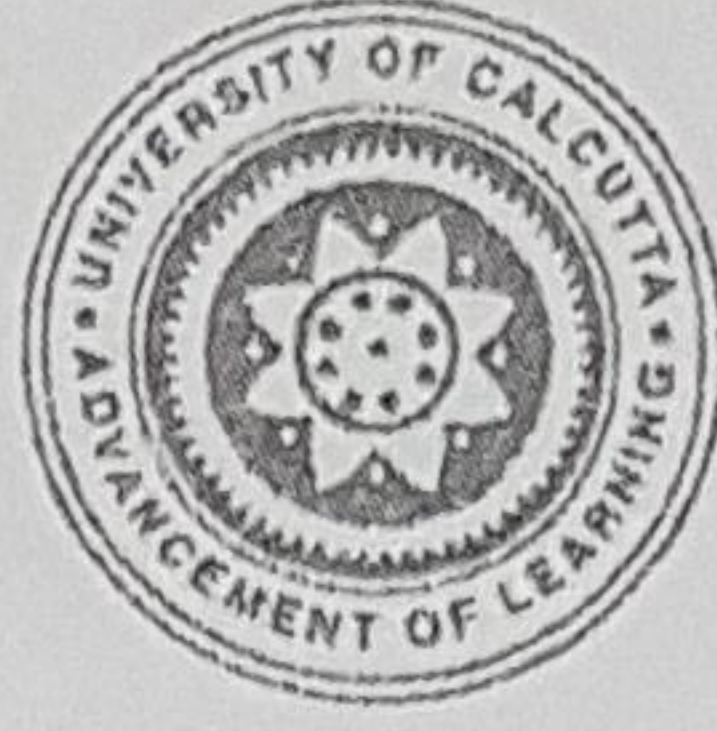

5. The allotted time for completion of the work 45 days from the date of receipt of work order .Time is the essence of this contract. Normally no time extension will be granted. In case of prayer for extension of time the University authority has the full right reserved to grant it or discard it.

6. (a) If the successful contractor's bid rate is 80% or less than the estimated amount put to tender the contractor will have to submit a Bank Guarantee amounting to 10% of the Tendered amount before issue of Work order failing which the EMD will be forfeited and the agency may be blacklisted. The Bank Guarantee should be valid till the end of the contract period and shall be renewed accordingly if required. This bank Guarantee is an Additional Performance Security .So provision of deducting Security deposit from bills will hold goods per relevant clause of the contract. The bank Gurrantee shall be returned immediately on successful completion of contract.

(b) The University authority will retain a sum amounting to 10% of the bill of the contract for a period of six months from the date of completion of work as **Security Deposit**. Which will be released after a period of six months from the date of completion of the work on application.

7. A sum of 5% of the estimated amount i.e value as mentioned in the NIT. in the form of demand draft in favour of UNIVERSITYOF CALCUTTA payable at Kolkata is to be attached with the tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenderers on application after issue of work order to the successful bidder. For successful tenderer the EMD will be returned on application after an equal amount of security deposit is deducted from the running bills.


Amount:- Rs

D.D No..... Dated / /20

Name of Issuing Bank:--

B ranch :-

8. Work is to be carried out as per specification laid in the B.O.Q or PWD specification as per instruction of the University Engineer or his representative.

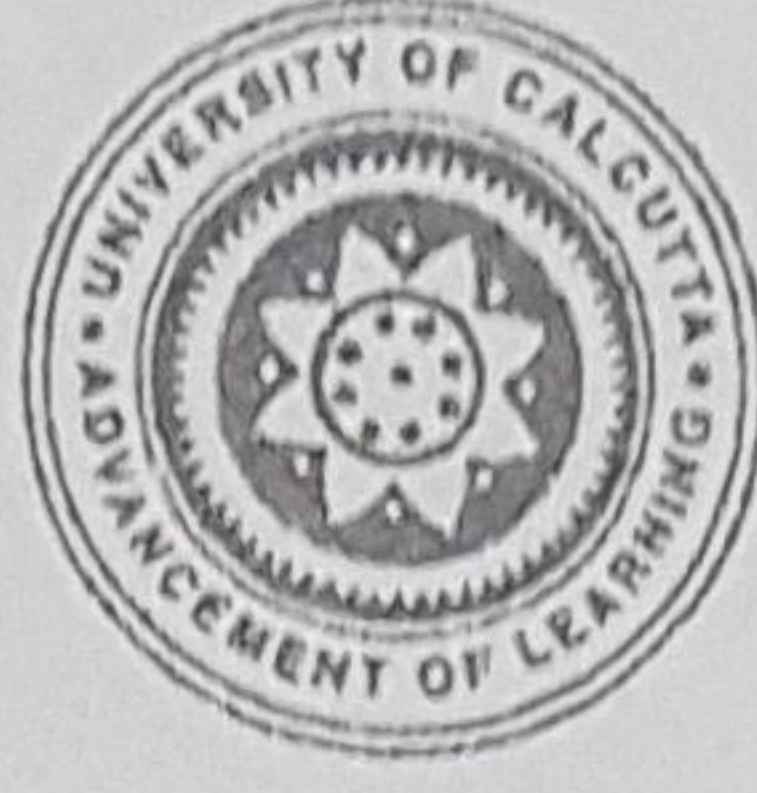

9. The materials brought to site for execution of the work should by no means be taken out of site without the permission of the Engineer C.U.
10. The rates must be quoted in words in figure other wise the tender will be cancelled.
11. The University will not be bound to accept the lowest bidder.
12. The University will not supply any materials to the contractor.
13. The contractor will work under the strict supervision of the Engineer/ Sub-Assistant Engineer. The estimate given along with the tender are provisional payment will be made on the actual work done jointly measured by the Engineer or his representative (Sub-Assistant Engineer) & the contractor or his representative. The contractor will have to submit bill in printed format in duplicate .
14. The contractor will have to take necessary instruction from the Engineer CU/ Sub-Assistant Engineer regarding the execution of work.
15. Defect & liability Period :- The defect & liability period will be for a period of six months from the date of completion of the job. Any defects pointed out during this period has to be mend good by the agency at their own cost failing which the retention money will be forfeited.

Sd/-

University Engineer

Name of the Agency:

Address :-

SIGNATURE OF THE CONTRACTOR WITH SEAL AND DATE

PRICE SCHEDULE FOR REPAIRING OF SURFACE DRAIN & COVERING IT AS PER PWD SCHEDULE 2017 AT
HIRANMAYEE

CHHATRI BHAVAN AT 53/2/4A HAZRA ROAD KOLKATA 19 EASTERN SIDE

SL NO	DESCRIPTION	UNIT	RATE	QTY	AMOUNT
1	Dismantling all types of masonry excepting cement concrete plain or reinforced, stacking serviceable materials at site and removing rubbish as directed within a lead of 75 m. a) In ground floor including roof.	cum	447	0.68	303.96
2	Removal of rubbish, earth etc. from the working site and disposal of the same beyond the compound, in conformity with the Municipal / Corporation Rules for such disposal, loading into truck and cleaning the site in all respect as per direction of Engineer in charge	cum	166	0.5	83
3	Cement concrete (1:1.5:3) with graded stone chips 5.6 mm size with hexagonal square mesh wire netting, I.R.C. fabric mesh or X.P. M. fitted and fixed after tying the existing reinforcement on concrete without distributing the same and with proper scarping and cleaning the reinforcement and disturbed concrete with wire brush etc. after applying a coat of cement including the cost of wire netting I.R.C or X. P. M. & cost of all handling and scaffolding complete as per direction of Engineer-in -charge. 20mm thick	sqm	488	30	14640
4	Ordinary Cement concrete (mix 1:1.5:3) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement if any, in ground floor as per relevant IS codes. (i) Pakur Variety	cum	4482	1.05	4706.1
5	Reinforcement for reinforced concrete work in all sorts of structures including distribution bars, stirrups, binders etc initial straightening and removal of loose rust (if necessary), cutting to requisite length, hooking and bending to correct shape, placing in proper position and binding with 16 gauge black annealed wire at every intersection, complete as per drawing and direction.	MT	58249	0.6	34949.4
					54682.46
				A	6561.895
				B	61244.36
				C	612.4436
				Total	61856.8
					61856
	Add 12% GST				
	Add 1% Labour Cess				



UNIVERSITY OF CALCUTTA
OFFICE OF THE UNIVERSITY ENGINEER
87/1 College Street
Darbhanga Building, Ground Floor
Kolkata-700073
Website :-www.caluniv.ac.in

NOTICE INVITING TENDER


University of Calcutta invites sealed tender from resourceful and bonafide contractors for the following work

1.	N.I.T. No	:	Eng /CT-284/18-19. Dated 18/01/2019
2.	Name of Work	:	REPAIRING OF DOORS & SPIRAL STAIR CASE AT PG MENS TECHNOLOGY HALL SIDE AS PER PWD SCHEDULE 2017
3.	Estimated Cost put to Tender	:-	Rs48479/-
4.	Earnest Money	:	A sum of Rs 2400/- (Rupees Two thousand four hundred only)in the form of CTS demand draft in favour of University of Calcutta payable at Kolkata is to be attached with the Tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenders on application after issuing of work order to the successful bidder. In case of sucessful tender the EMD will be returned on application after an equal amount of security deposit is ducted by the University from the running bills.
5.	Time of completion	:	20days
6.	Eligibility Criteria	:	Valid trade License , GST & Pan and credential for satisfactory completion of similar nature of job. Amounting 75 % of the estimated value in a single tender in the last three financial year . Government, Government Undertaking and University of Calcutta credentials are accepted.(only completion certificate of the work should be treated as Credential.
7.	Last date of receipt of application f or tender	:	NA
8.	Last date of Sale/ issue of tender papers	:	TO BE DOWNLOADED FROM WEBSITE.(www. caluniv.ac.in)
9.	Last Date and Time of tender Submission	:	31/01/2019.(up to 2.00 PM)
10.	Date and Time of Tender Opening	:	On or after 3:00 PM 31/01/2019

N.I.T no ,Name of work and the date of opening should be written on the sealed envelope otherwise tender will not be opened thus cancelled.

The undersigned reserves the right to reject any or all Tenders without assigning any reason what so ever.

University Engineer C.U.

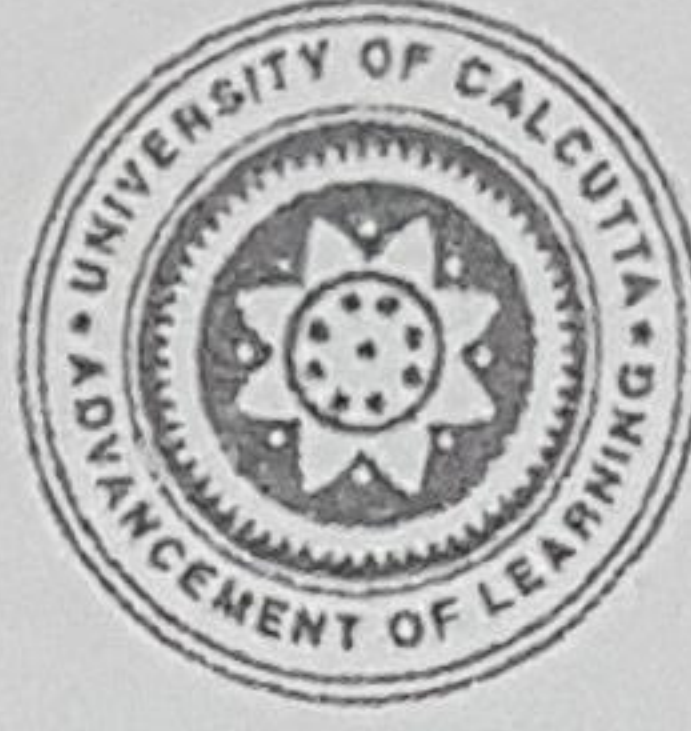

UNIVERSITY OF CALCUTTA

Name of the work:- REPAIRING OF DOORS & SPIRAL STAIR CASE AT PG MENS TECHNOLOGY HALL SIDE AS PER PWD SCHEDULE 2017

N. I.T. no- Eng /CT-284/18-19. Dated 18/ 01/ 2019

Estimated cost Put to Tender:- Rs48479/-

Name of Agency:-

Address of Agency:-

Rate quoted by Agency:- (%)
Percent Above / At par / Below

Signature of the Agency with date & stamp:-



UNIVERSITY OF CALCUTTA

N. I.T. no- Eng /CT-284/18-19. Dated 18/ 01/ 2019

TENDER AND CONTRACT FOR WORK

GENERAL TERMS AND DIRECTION FOR THE GUIDANCE OF CONTRACT

1. Eligible Tenders will have to download the tender papers from the website & drop the filled tender papers signed with seal and date at every page along with copy of Valid Trade license's, GST & PAN and Credential for satisfactory completion of similar nature of job amounting to at least seventy five percent of the job value in a single tender from any Government, Govt. undertaking or University of Calcutta in the last three financial year in sealed envelope in the Tender box kept in the Office of the undersigned with in the specified time mentioned in the NIT. which will be opened by the undersigned or by his representative with in **the specified time and date mentioned in the NIT.** The tendered must write the name of the work , NIT no , the date of opening and name of the bidder on the envelop failing which the tender will not be opened thus will be treated as cancelled.
2. The rate should be quoted after inspection of the site and inclusive of all incidental charges i.e. freight, insurances, labour insurances, handling charges, necessary government taxes, duties etc as well as the Water, Electricity charges which are to be paid as per rules .
3. The contractor shall be responsible to ensure compliance with the provision of minimum wages act 1948 as modified up to date and the rules made in respect of any employees, employed by the contractor directly or through the petty or subcontractor for the purpose of carrying this contract. The contractor shall be responsible for any damage, injury or loss caused by the work or workmen to any person, animal or material during the progress of work.
4. Liquidated damage will be charged to the contractor if they fail to complete the work within the stipulated time, 0.01% per day to a maximum limit of 05 % of the contract value .



5. The allotted time for completion of the work 45 days from the date of receipt of work order. Time is the essence of this contract. Normally no time extension will be granted. In case of prayer for extension of time the University authority has the full right reserved to grant it or discard it.

6. (a) If the successful contractor's bid rate is 80% or less than the estimated amount put to tender the contractor will have to submit a Bank Guarantee amounting to 10% of the Tendered amount before issue of Work order failing which the EMD will be forfeited and the agency may be blacklisted. The Bank Guarantee should be valid till the end of the contract period and shall be renewed accordingly if required. This bank Guarantee is an Additional Performance Security. So provision of deducting Security deposit from bills will hold goods per relevant clause of the contract. The bank Guarantee shall be returned immediately on successful completion of contract.

(b) The University authority will retain a sum amounting to 10% of the bill of the contract for a period of six months from the date of completion of work as **Security Deposit**. Which will be released after a period of six months from the date of completion of the work on application.

7. A sum of 5% of the estimated amount i.e. value as mentioned in the NIT. in the form of demand draft in favour of UNIVERSITY OF CALCUTTA payable at Kolkata is to be attached with the tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenderers on application after issue of work order to the successful bidder. For successful tenderer the EMD will be returned on application after an equal amount of security deposit is deducted from the running bills.


Amount:- Rs

D.D No..... Dated / /20

Name of Issuing Bank:--

Branch :-

8. Work is to be carried out as per specification laid in the B.O.Q or PWD specification as per instruction of the University Engineer or his representative.

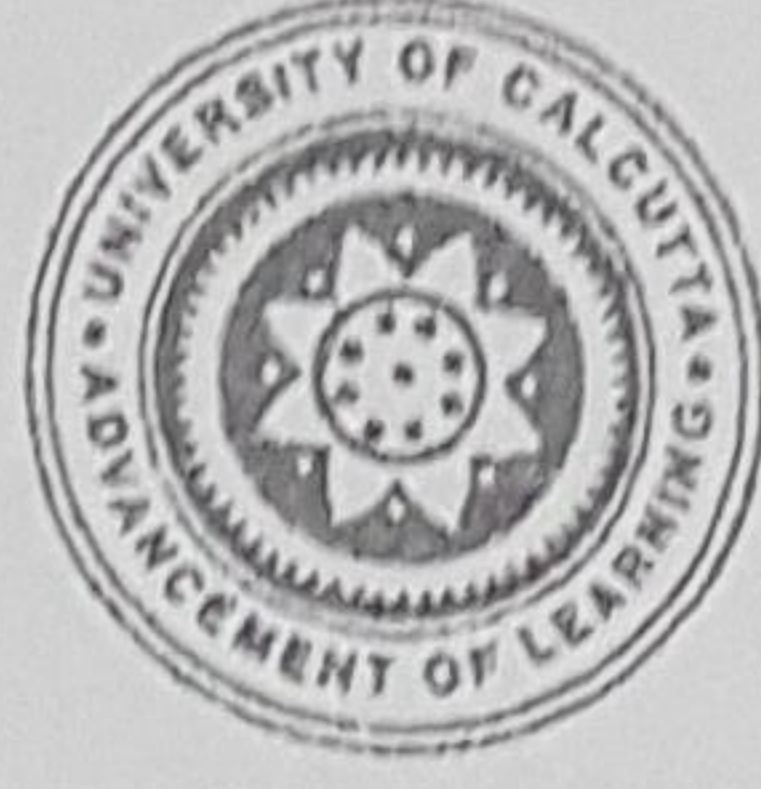

9. The materials brought to site for execution of the work should by no means be taken out of site without the permission of the Engineer C.U.
10. The rates must be quoted in words in figure other wise the tender will be cancelled.
11. The University will not be bound to accept the lowest bidder.
12. The University will not supply any materials to the contractor.
13. The contractor will work under the strict supervision of the Engineer/ Sub-Assistant Engineer. The estimate given along with the tender are provisional payment will be made on the actual work done jointly measured by the Engineer or his representative (Sub-Assistant Engineer) & the contractor or his representative. The contractor will have to submit bill in printed format in duplicate .
14. The contractor will have to take necessary instruction from the Engineer CU/ Sub-Assistant Engineer regarding the execution of work.
15. Defect & liability Period :- The defect & liability period will be for a period of six months from the date of completion of the job. Any defects pointed out during this period has to be mend good by the agency at their own cost failing which the retention money will be forfeited.

Sd/-

University Engineer

Name of the Agency:

Address :-

SIGNATURE OF THE CONTRACTOR WITH SEAL AND DATE


PRICE SCHEDULE FOR REPAIRING OF DOORS & SPIRAL STAIR CASE AT PG MENS TECHNOLOGY HALL
AS PER PWD SCHEDULE 2017

SL NO	DESCRIPTION	UNIT	RATE	QTY	AMOUNT
1	Brick work with 1st class bricks in cement mortar (1:6) In superstructure, ground floor .25x.25x2.5x2= .35	cum	5529	0.5	2764.5
2	Ordinary Cement concrete (mix 1:2:4) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement, if any, in ground floor as per relevant IS codes. a) Pakur Variety .15x.15x .25x6= .04	cum	3886	0.05	194.3
3	M.S. works in brackets made from flats, angles, tees etc. to sizes specialy bent, twisted, forged; making holes drilled and fitted to rafter of trusses with necessary bolts, nuts, washer or screws etc. (length of straight not less than 230 mm) (2.1x2+1.2x2)x2 x4.42=58.34kg x2 =116.68	qtl	7335	2.4	17604
4	Supplying 1.5mm thick MS sheet fitted & fixed on one or both sides 2.1x1.2x2 =5.04	sqm	977	5.04	4924.08
5	Supplying, fitting and fixing cast iron heavy type spiral staircase of approved design with 50 mm.dia. Stem and C.I. Steps 150 mm as per design 900 mm. high C.I, railing including necessary M.S. tie of suitable section embedded to wall with cement concrete (1:2:4) including cost of intermediate C.I. platform secured with necessary tie to stem and wall with cement concrete (1:2:4) including fixing the stem in ground with cement concrete (1:3:6) complete in all respect with all labour and materials With 900 mm.dia. well	Rm	3882	3.4	13198.8
6	Welding in M.S. structural work with gas or electric: (a) Tack weld	pt	9	36	324
7	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course,				

It
21/pg

108

	scaffolding/staging where necessary (Ground floor).[Excluding cost of chipping over concrete surface]	sqm	167	10	1670
	b) 20 mm thick plaster 1:6 .25x2.5x4x4=10				
8	(a) Priming one coat on steel or other metal surface with synthetic oil bound primer of approved quality including smoothening surfaces by sand papering etc.	sqm	29	20.16	584.64
9	A) Painting with best quality synthetic enamel paint of approved make and brand including smoothening surface by sand papering etc. including using of approved putty etc. on the surface, if necessary On steel or other metal surface : Two coats other than white	sqm	79	20.16	1592.64
					42856.96
	Add 12 % GST				5142.835
					47999.8
	Add 1% GST				479.998
					48479.79

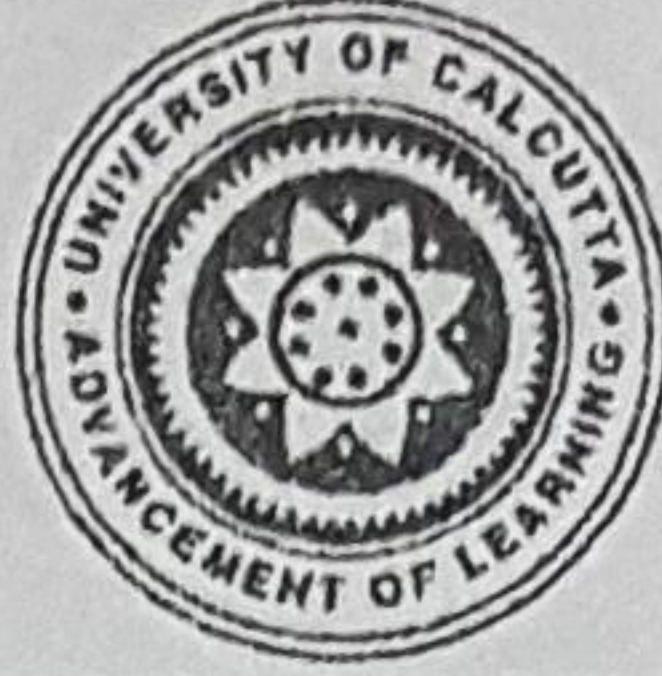

UNIVERSITY OF CALCUTTA
OFFICE OF THE UNIVERSITY ENGINEER
87/1 College Street
Darbhanga Building, GroundFloor
Kolkata-700073
Website :-www.caluniv.ac.in

NOTICE INVITING TENDER


University of Calcutta invites sealed tender from resourceful and bonafide contractors for the following work

1.	N.I.T. No	:	Eng /CT-285/18-19. Dated 18/ 01/ 2019
2.	Name of Work	:	RENOVATION OF UNION ROOM OF INTUC AT BALLYGUNGE SC COLLEGE AT 35, BALLYGUNGE CIRCULAR ROAD GROUND FLOOR AS PER PWD SCHEDULE 2017
3.	Estimated Cost put to Tender	:-	Rs58097/-
4.	Earnest Money	:	A sum of of Rs 2900- (Rupees Two thousand nine hundred only) in the form of CTS demand draft in favour of University of Calcutta payable at Kolkata is to be attached with the Tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenders on application after issuing of work order to the successful bidder. In case of sucessful tender the EMD will be returned on application after an equal amount of security deposit is ducted by the University from the running bills.
5.	Time of completion	:	20days
6.	Eligibility Criteria	:	Valid trade License , GST & Pan and credential for satisfactory completion of similar nature of job. Amounting 75 % of the estimated value in a single tender in the last three financial year . Government, Government Undertaking and University of Calcutta credentials are accepted.(only completion certificate of the work should be treated as Credential.
7.	Last date of receipt of application f or tender	:	NA
8.	Last date of Sale/ issue of tender papers	:	TO BE DOWNLOADED FROM WEBSITE.(www. caluniv.ac.in)
9.	Last Date and Time of tender Submission	:	31/01/2019.(up to 2.00 PM)
10.	Date and Time of Tender Opening	:	On or after 3:00 PM 31/01/2019

N.I.T no ,Name of work and the date of opening should be written on the sealed envelope otherwise tender will not be opened thus cancelled.

The undersigned reserves the right to reject any or all Tenders without assigning any reason what so ever.

18/1/19
University Engineer C.U.

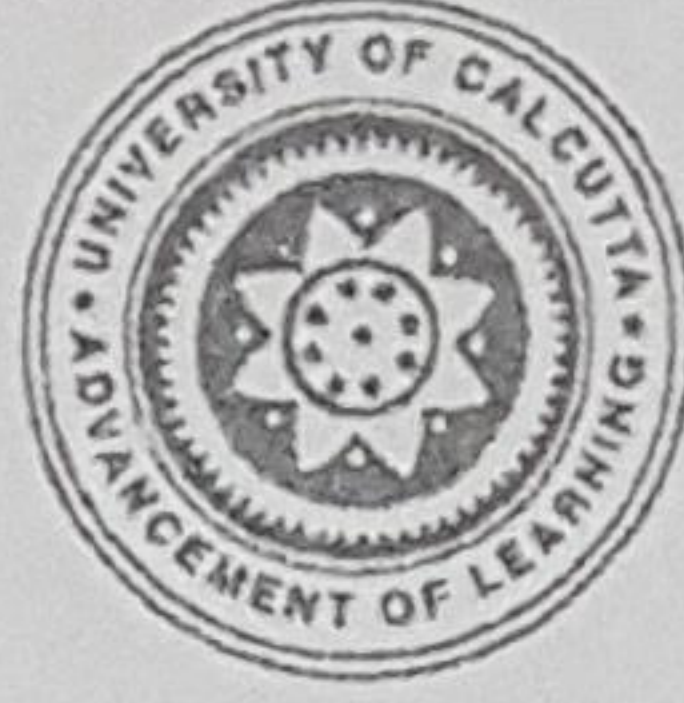

UNIVERSITY OF CALCUTTA

Name of the work:- RENOVATION OF UNION ROOM OF INTUC AT BALLYGUNGE SC COLLEGE AT 35, BALLYGUNGE CIRCULAR ROAD GROUND FLOOR AS PER PWD SCHEDULE 2017

N. I.T. no- Eng /CT-285/18-19. Dated 18/ 01/ 2019


Estimated cost Put to Tender:- Rs58097/-

Name of Agency:-

Address of Agency:-

Rate quoted by Agency:- (%)
Percent Above / At par / Below

Signature of the Agency with date & stamp:-

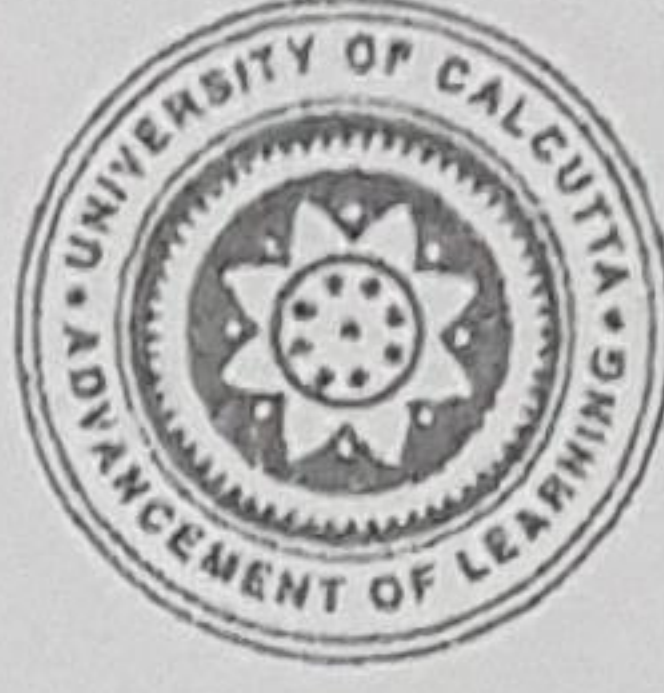

UNIVERSITY OF CALCUTTA

N. I.T. no- Eng /CT-285/18-19. Dated 18/ 01/ 2019

TENDER AND CONTRACT FOR WORK

GENERAL TERMS AND DIRECTION FOR THE GUIDANCE OF CONTRACT

1. Eligible Tenders will have to download the tender papers from the website & drop the filled tender papers signed with seal and date at every page along with copy of Valid Trade license's, GST & PAN and Credential for satisfactory completion of similar nature of job amounting to at least seventy five percent of the job value in a single tender from any Government, Govt. undertaking or University of Calcutta in the last three financial year in sealed envelope in the Tender box kept in the Office of the undersigned with in the specified time mentioned in the NIT. which will be opened by the undersigned or by his representative with in **the specified time and date mentioned in the NIT.** The tendered must write the name of the work , NIT no , the date of opening and name of **the bidder on the envelop failing which the tender will not be opened thus will be treated as cancelled.**
2. The rate should be quoted after inspection of the site and inclusive of all incidental charges i.e. freight, insurances, labour insurances, handling charges, necessary government taxes, duties etc as well as the Water, Electricity charges which are to be paid as per rules .
3. The contractor shall be responsible to ensure compliance with the provision of minimum wages act 1948 as modified up to date and the rules made in respect of any employees, employed by the contractor directly or through the petty or subcontractor for the purpose of carrying this contract. The contractor shall be responsible for any damage, injury or loss caused by the work or workmen to any person, animal or material during the progress of work.
4. Liquidated damage will be charged to the contractor if they fail to complete the work within the stipulated time, 0.01% per day to a maximum limit of 05 % of the contract value .



5. The allotted time for completion of the work 45 days from the date of receipt of work order .Time is the essence of this contract. Normally no time extension will be granted. In case of prayer for extension of time the University authority has the full right reserved to grant it or discard it.

6. (a) If the successful contractor's bid rate is 80% or less than the estimated amount put to tender the contractor will have to submit a Bank Guarantee amounting to 10% of the Tendered amount before issue of Work order failing which the EMD will be forfeited and the agency may be blacklisted. The Bank Guarantee should be valid till the end of the contract period and shall be renewed accordingly if required. This bank Guarantee is an Additional Performance Security .So provision of deducting Security deposit from bills will hold goods per relevant clause of the contract. The bank Gurrantee shall be returned immediately on successful completion of contract.

(b) The University authority will retain a sum amounting to 10% of the bill of the contract for a period of six months from the date of completion of work as **Security Deposit**. Which will be released after a period of six months from the date of completion of the work on application.

7. A sum of 5% of the estimated amount i.e value as mentioned in the NIT. in the form of demand draft in favour of UNIVERSITYOF CALCUTTA payable at Kolkata is to be attached with the tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenderers on application after issue of work order to the successful bidder. For successful tenderer the EMD will be returned on application after an equal amount of security deposit is deducted from the running bills.

Amount:- Rs

D.D No..... **Dated** / /20

Name of Issuing Bank:--

B ranch :-

8. Work is to be carried out as per specification laid in the B.O.Q or PWD specification as per instruction of the University Engineer or his representative.



9. The materials brought to site for execution of the work should by no means be taken out of site without the permission of the Engineer C.U.
10. The rates must be quoted in words in figure other wise the tender will be cancelled.
11. The University will not be bound to accept the lowest bidder.
12. The University will not supply any materials to the contractor.
13. The contractor will work under the strict supervision of the Engineer/ Sub-Assistant Engineer. The estimate given along with the tender are provisional payment will be made on the actual work done jointly measured by the Engineer or his representative(Sub-Assistant Engineer) & the contractor or his representative. The contractor will have to submit bill in printed format in duplicate .
14. The contractor will have to take necessary instruction from the Engineer CU/ Sub-Assistant Engineer regarding the execution of work.
15. Defect & liability Period :- The defect & liability period will be for a period of six months from the date of completion of the job. Any defects pointed out during this period has to be mend good by the agency at their own cost failing which the retention money will be forfeited.

Sd/-

University Engineer

Name of the Agency:

Address :-

SIGNATURE OF THE CONTRACTOR WITH SEAL AND DATE

PRICE SCHEDULE FOR REPAIR RENOVATION OF UNION ROOM OF I N T U C AT BALLYGUNGE SC COLLEGE

CAMPUS AT 35, BALLYGUNGE CIRCULAR ROAD AS PER PWD SCHEDULE

NO	DESCRIPTION	UNIT	RATE	QTY	AMOUNT
1	Stripping worn out plaster & raking out joints as per direction of Engg in Charge.	sqm	19	78.64	1494.16
2	Dismantling Brickwork ...as per Engg in charge	cum	447	3	1341
3	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course, scaffolding/staging where necessary (Ground floor).[Excluding cost of chipping over concrete surface] 1:6 , 25 mm thk	sqm	195	78.64	15334.8
4	Supply fitting fixing Aluminium Windows as per direction of Engg in charge	sqm	2400	1.92	4608
5	Supply fitting fixing grills upto 16kg/sqm	Kg	72	36	2592
6	Cleaning the walls and ceiling with scraping and sand papering etc	sqm	11.92	78.64	937.3888
7	Primer to walls and ceiling after sand papering and cleaning	sqm	38	78.64	2988.32
8	Synthetic Enamel paint ...with primer as per Engg in charge	sqm	81	5.04	408.24
9	Painting with distemper as per Engg in Charge	sqm	70	79.64	5574.8
10	MS gate of Jail type as per approved design ...made of strong MS frame work ...as per direction of Engg in charge	qtl	7500	0.75	5625
11	Cement concrete (1:1.5:3) with graded stone chips 5.6 mm size with hexagonal square mesh wire netting, I.R.C. fabric mesh or X.P. M. fitted and fixed after tying the existing reinforcement on concrete without distributing the same and with proper scarping and cleaning the reinforcement and disturbed concrete with wire brush etc. after applying a coat of cement including the cost of wire netting I.R.C or X. P. M. & cost of all				

handling and scaffolding complete
25mm thick

sqm	586	15	8790
			49693.71
Add 12% GST			7686.35
Add 1% Labour Cess			<u>717.39</u>
			58097.45



UNIVERSITY OF CALCUTTA
OFFICE OF THE UNIVERSITY ENGINEER
87/1 College Street
Darbhanga Building, GroundFloor
Kolkata-700073
Website :-www.caluniv.ac.in

NOTICE INVITING TENDER

University of Calcutta invites **sealed** tender from resourceful and bonafide contractors for the following work

1.	N.I.T. No	:	Eng /CT-286/18-19. Dated 18/01/2019
2.	Name of Work	:	REPAIRING OF UNDERGROUND RESERVOIR & BOUNDARY WALL OF HIRANMAYEE CHATTRIBHAVAN AT 53/2/4A HAZRA ROAD AS PER PWD SCHEDULE 2017
3.	Estimated Cost put to Tender	:-	Rs48954/-
4.	Earnest Money	:	A sum of of Rs 2500- (Rupees Two thousand five hundred only) in the form of CTS demand draft in favour of University of Calcutta payable at Kolkata is to be attached with the Tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenders on application after issuing of work order to the successful bidder. In case of successful tender the EMD will be returned on application after an equal amount of security deposit is deducted by the University from the running bills.
5.	Time of completion	:	20days
6.	Eligibility Criteria	:	Valid trade License , GST & Pan and credential for satisfactory completion of similar nature of job. Amounting 75 % of the estimated value in a single tender in the last three financial year . Government, Government Undertaking and University of Calcutta credentials are accepted.(only completion certificate of the work should be treated as Credential.
7.	Last date of receipt of application f or tender	:	NA
8.	Last date of Sale/ issue of tender papers	:	TO BE DOWNLOADED FROM WEBSITE.(www. caluniv.ac.in)
9.	Last Date and Time of tender Submission	:	31/01/2019.(up to 2.00 PM)
10.	Date and Time of Tender Opening	:	On or after 3:00 PM 31/01/2019

N.I.T no ,Name of work and the date of opening should be written on the sealed envelope otherwise tender will not be opened thus cancelled.

The undersigned reserves the right to reject any or all Tenders without assigning any reason what so ever.

University Engineer C.U.



UNIVERSITY OF CALCUTTA

Name of the work:- REPAIRING OF UNDERGROUND RESERVOIR & BOUNDARY WALL OF HIRANMAYEE CHATTRIBHAVAN AT 53/2/4A HAZRA ROAD AS PER PWD SCHEDULE 2017

N. I.T. no- Eng /CT-286/18-19. Dated 18/ 01/ 2019

Estimated cost Put to Tender:- Rs48954/-

Name of Agency:-

Address of Agency:-

Rate quoted by Agency:- (%)
Percent Above / At par / Below

Signature of the Agency with date & stamp:-



UNIVERSITY OF CALCUTTA

N. I.T. no- Eng /CT-286/18-19. Dated 19/ 01/ 2019

TENDER AND CONTRACT FOR WORK

GENERAL TERMS AND DIRECTION FOR THE GUIDANCE OF CONTRACT

1. Eligible Tenders will have to download the tender papers from the website & drop the filled tender papers signed with seal and date at every page along with copy of Valid Trade license's, GST & PAN and Credential for satisfactory completion of similar nature of job amounting to at least seventy five percent of the job value in a single tender from any Government, Govt. undertaking or University of Calcutta in the last three financial year in sealed envelope in the Tender box kept in the Office of the undersigned with in the specified time mentioned in the NIT. which will be opened by the undersigned or by his representative with in **the specified time and date mentioned in the NIT.** The tendered must write the name of the work , NIT no , the date of opening and name of **the bidder on the envelop failing which the tender will not be opened thus will be treated as cancelled.**
2. The rate should be quoted after inspection of the site and inclusive of all incidental charges i.e. freight, insurances, labour insurances, handling charges, necessary government taxes, duties etc as well as the Water, Electricity charges which are to be paid as per rules .
3. The contractor shall be responsible to ensure compliance with the provision of minimum wages act 1948 as modified up to date and the rules made in respect of any employees, employed by the contractor directly or through the petty or subcontractor for the purpose of carrying this contract. The contractor shall be responsible for any damage, injury or loss caused by the work or workmen to any person, animal or material during the progress of work.
4. Liquidated damage will be charged to the contractor if they fail to complete the work within the stipulated time, 0.01% per day to a maximum limit of 05 % of the contract value .



5. The allotted time for completion of the work 45 days from the date of receipt of work order. Time is the essence of this contract. Normally no time extension will be granted. In case of prayer for extension of time the University authority has the full right reserved to grant it or discard it.

6. (a) If the successful contractor's bid rate is 80% or less than the estimated amount put to tender the contractor will have to submit a Bank Guarantee amounting to 10% of the Tendered amount before issue of Work order failing which the EMD will be forfeited and the agency may be blacklisted. The Bank Guarantee should be valid till the end of the contract period and shall be renewed accordingly if required. This bank Guarantee is an Additional Performance Security. So provision of deducting Security deposit from bills will hold goods per relevant clause of the contract. The bank Guarantee shall be returned immediately on successful completion of contract.

(b) The University authority will retain a sum amounting to 10% of the bill of the contract for a period of six months from the date of completion of work as **Security Deposit**. Which will be released after a period of six months from the date of completion of the work on application.

7. A sum of 5% of the estimated amount i.e. value as mentioned in the NIT. in the form of demand draft in favour of UNIVERSITY OF CALCUTTA payable at Kolkata is to be attached with the tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenderers on application after issue of work order to the successful bidder. For successful tenderer the EMD will be returned on application after an equal amount of security deposit is deducted from the running bills.

Amount:- Rs

D.D No..... Dated / /20

Name of Issuing Bank:--

B ranch :-

8. Work is to be carried out as per specification laid in the B.O.Q or PWD specification as per instruction of the University Engineer or his representative.



9. The materials brought to site for execution of the work should by no means be taken out of site without the permission of the Engineer C.U.

10. The rates must be quoted in words in figure other wise the tender will be cancelled.

11. The University will not be bound to accept the lowest bidder.

12. The University will not supply any materials to the contractor.

13. The contractor will work under the strict supervision of the Engineer/ Sub-Assistant Engineer. The estimate given along with the tender are provisional payment will be made on the actual work done jointly measured by the Engineer or his representative (Sub-Assistant Engineer) & the contractor or his representative. The contractor will have to submit bill in printed format in duplicate .

14. The contractor will have to take necessary instruction from the Engineer CU/ Sub-Assistant Engineer regarding the execution of work.

15. Defect & liability Period :- The defect & liability period will be for a period of six months from the date of completion of the job. Any defects pointed out during this period has to be mend good by the agency at their own cost failing which the retention money will be forfeited.

Sd/-

University Engineer

Name of the Agency:

Address :-

SIGNATURE OF THE CONTRACTOR WITH SEAL AND DATE

PRICE SCHEDULE FOR REPAIRING OF UNDERGROUND RESERVOIRS & BOUNDARY WALL PART

AS PER PWD SCHEDULE 2017 AT HIRANMAYEE CHHATRI BHAVAN AT 53/2/4A HAZRA ROAD KOLKATA

SL NO	DESCRIPTION	UNIT	RATE	QTY	AMOUNT
1	Stripping off worn out plaster and raking out joints of walls, celings etc. upto any height and in any floor including removing rubbish within a lead of 75m as directed Dismantling R.C. floor, roof, beams etc. including cutting rods and removing rubbish as directed within a lead of 75 m. including stacking of steel bars.	sqm	19	74.16	1409.04
2	(a) In ground floor including roof. 3.2X2.4X.05=.38	cum	1956	0.38	743.28
3	Removal of rubbish,earth etc. from the working site and disposal of the same beyond the compound, in conformity with the Municipal / Corporation Rules for such disposal, loading into truck and cleaning the site in all respect as per direction of Engineer in charge 6.96X.05=.4CUM	cum	166	0.5	83
4	Cement concrete (1:1.5:3) with graded stone chips 5.6 mm size with hexagonal square mesh wire netting, I.R.C. fabric mesh or X.P. M. fitted and fixed after tying the existing reinforcement on concrete without distributing the same and with proper scarping and cleaning the reinforcement and disturbed concrete with wire brush etc. after applying a coat of cement including the cost of wire netting I.R.C or X. P. M. & cost of all handling and scaffolding complete as per direction of Engineer-in -charge. 20mm thick 6.96	sqm	488	6.96	3396.48
5	Applying epoxy based reactive joining agent for joining the old concrete with fresh concrete to be applied within manufacturer's specified time as per manufacturers specification. (0.4 Kg / m ² of concrete surface). .4x37.64	sqm	309	10	3090
6	Cleaning the concrete surface by removing dirt and debris, marking defective				

	locations and removing loose concrete by careful stripping until hard surface is exposed, cutting the concrete to regular shape, wire brushing the exposed surface and removing debris from site complete as per direction of the Engineer - in - Charge	sqm	90	10	900
7	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course, scaffolding/staging where necessary (Ground floor).[Excluding cost of chipping over concrete surface] (i) With 1:6 cement mortar (a) 20 mm thick plaster	sqm	167	74.16	12384.72
8	Artificial stone in floor, dado, staircase etc with cement concrete (1:2:4) with stone chips, laid in panels as directed with topping made with ordinary or white cement (as necessary) and marble dust in proportion (1:2) including smooth finishing and rounding off corners including raking out joints or roughening of concrete surface and application of cement slurry before flooring works using cement @ 1.75 kg/sq.m all complete including all materials and labour. In ground floor. 3 mm. thick topping (High polishing grinding on this item is not permitted with ordinary cement). Using grey cement	sqm	237	10	2370
9	Priming one coat on timber or plastered surface with synthetic oil bound primer of approved quality including smoothing surfaces by sand papering etc. $14 \times 3.1 \times 3.2 = 138.88$	sqm	38	140	5320
10	Protective and Decorative Acrylic exterior emulsion paint of approved quality, as per manufacturer's specification and as per direction of Engineer-in-Charge to be applied over acrylic primer as required. The rate includes cost of material, labour, scaffolding and all incidental charges but excluding the cost of primer. In Ground floor (Two Coat)				

Super Protective 100% Acrylic Emulsion.

sqm 97 140 13580

43276.52

Add 12% GST


5193.182

Add 1% labour cess

484.697

48954.4

Total 48954.4

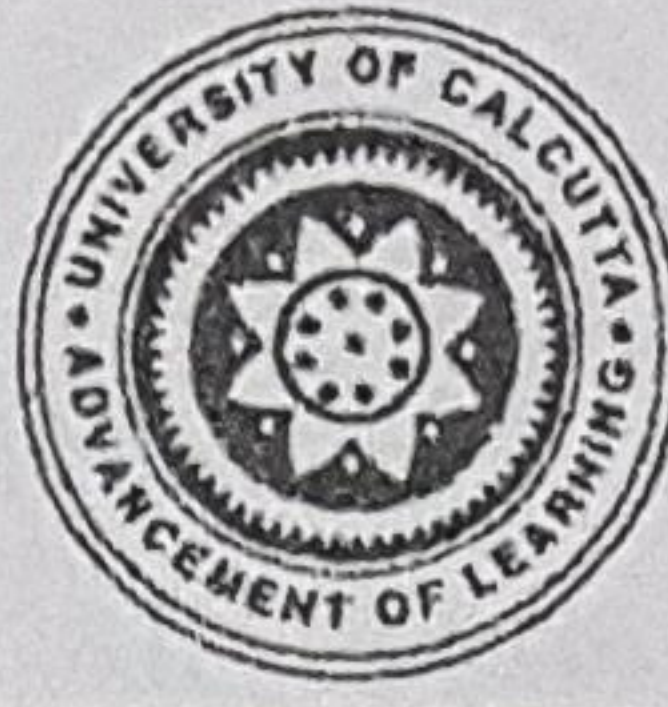

UNIVERSITY OF CALCUTTA
OFFICE OF THE UNIVERSITY ENGINEER
87/1 College Street
Darbhanga Building, Ground Floor
Kolkata-700073
Website :-www.caluniv.ac.in


NOTICE INVITING TENDER


University of Calcutta invites **sealed** tender from resourceful and bonafide contractors for the following work

1.	N.I.T. No	:	Eng /CT-287/18-19. Dated 18/01/2019
2.	Name of Work	:	REPAIRING BOUNDARY WALL PART EASTERN SIDE & NORTHERN SIDE at HIRANMAYEE CHATTRIBHAVAN AT 53/2/4A HAZRA ROAD AS PER PWD SCHEDULE 2017
3.	Estimated Cost put to Tender	:-	Rs111518/-
4.	Earnest Money	:	A sum of of Rs 5550- (Rupees Five thousand five hundred & fifty only) in the form of CTS demand draft in favour of University of Calcutta payable at Kolkata is to be attached with the Tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenders on application after issuing of work order to the successful bidder. In case of sucessful tender the EMD will be returned on application after an equal amount of security deposit is ducted by the University from the running bills.
5.	Time of completion	:	20days
6.	Eligibility Criteria	:	Valid trade License , GST & Pan and credential for satisfactory completion of similar nature of job. Amounting 75 % of the estimated value in a single tender in the last three financial year . Government, Government Undertaking and University of Calcutta credentials are accepted.(only completion certificate of the work should be treated as Credential.
7.	Last date of receipt of application f or tender	:	NA
8.	Last date of Sale/ issue of tender papers	:	TO BE DOWNLOADED FROM WEBSITE.(www. caluniv.ac.in)
9.	Last Date and Time of tender Submission	:	31/01/2019. (up to 2.00 PM)
10.	Date and Time of Tender Opening	:	On or after 3:00 PM 31/01/2019

N.I.T no ,Name of work and the date of opening should be written on the sealed envelope otherwise tender will not be opened thus cancelled.

The undersigned reserves the right to reject any or all Tenders without assigning any reason what so ever.

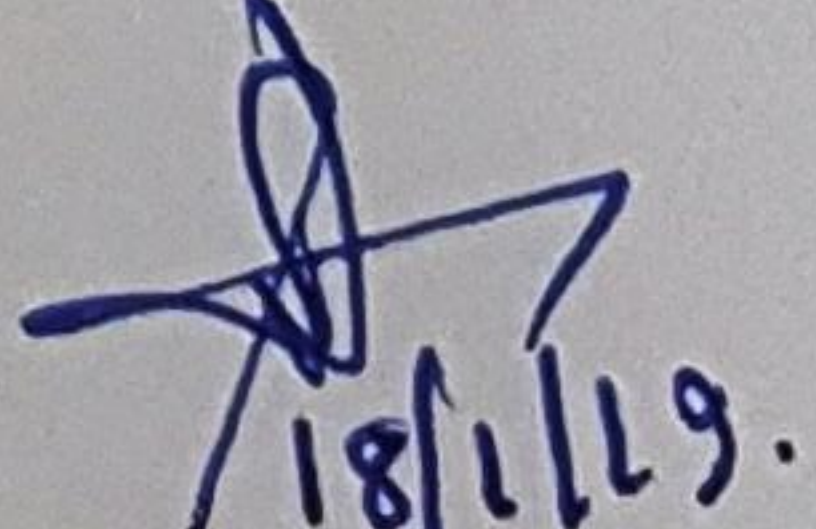
18/01/19.
University Engineer C.U.

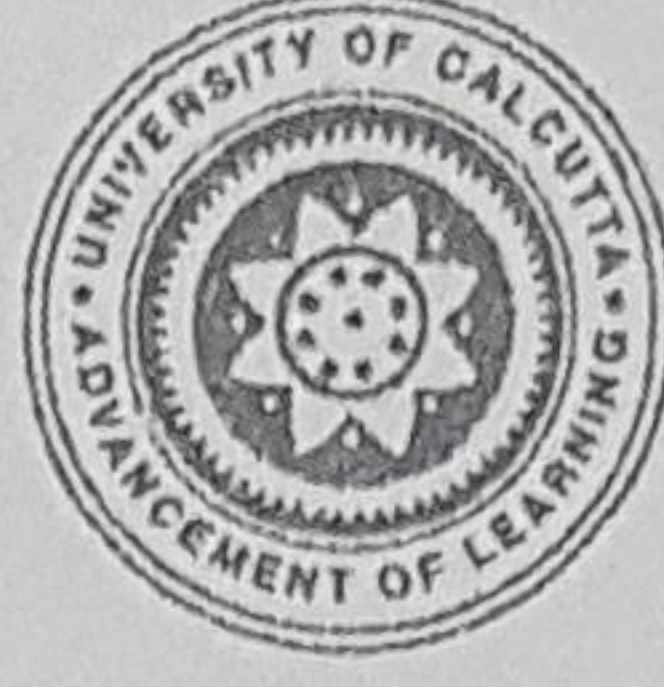

UNIVERSITY OF CALCUTTA

Name of the work:- REPAIRING BOUNDARY WALL PART EASTERN SIDE & NORTHERN SIDE at HIRANMAYEE CHATTRIBHAVAN
AT 53/2/4A HAZRA ROAD AS PER PWD SCHEDULE 2017

N. I.T. no- Eng /CT-287/18-19. Dated 18/ 01/ 2019

Estimated cost Put to Tender:- Rs111518/-

Name of Agency:-

Address of Agency:-

Rate quoted by Agency:- (%)
Percent Above / At par / Below

Signature of the Agency with date & stamp:-



UNIVERSITY OF CALCUTTA

N. I.T. no- Eng /CT-287/18-19. Dated 18/01/2019

TENDER AND CONTRACT FOR WORK

GENERAL TERMS AND DIRECTION FOR THE GUIDANCE OF CONTRACT

1. Eligible Tenders will have to download the tender papers from the website & drop the filled tender papers signed with seal and date at every page along with copy of Valid Trade license's, GST & PAN and Credential for satisfactory completion of similar nature of job amounting to at least seventy five percent of the job value in a single tender from any Government, Govt. undertaking or University of Calcutta in the last three financial year in sealed envelope in the Tender box kept in the Office of the undersigned with in the specified time mentioned in the NIT. which will be opened by the undersigned or by his representative with in **the specified time and date mentioned in the NIT.** The tendered must write the name of the work , NIT no , the date of opening and name of **the bidder on the envelop failing which the tender will not be opened thus will be treated as cancelled.**
2. The rate should be quoted after inspection of the site and inclusive of all incidental charges i.e. freight, insurances, labour insurances, handling charges, necessary government taxes, duties etc as well as the Water, Electricity charges which are to be paid as per rules .
3. The contractor shall be responsible to ensure compliance with the provision of minimum wages act 1948 as modified up to date and the rules made in respect of any employees, employed by the contractor directly or through the petty or subcontractor for the purpose of carrying this contract. The contractor shall be responsible for any damage, injury or loss caused by the work or workmen to any person, animal or material during the progress of work.
4. Liquidated damage will be charged to the contractor if they fail to complete the work within the stipulated time, 0.01% per day to a maximum limit of 05 % of the contract value .



5. The allotted time for completion of the work 45 days from the date of receipt of work order. Time is the essence of this contract. Normally no time extension will be granted. In case of prayer for extension of time the University authority has the full right reserved to grant it or discard it.

6. (a) If the successful contractor's bid rate is 80% or less than the estimated amount put to tender the contractor will have to submit a Bank Guarantee amounting to 10% of the Tendered amount before issue of Work order failing which the EMD will be forfeited and the agency may be blacklisted. The Bank Guarantee should be valid till the end of the contract period and shall be renewed accordingly if required. This bank Guarantee is an Additional Performance Security. So provision of deducting Security deposit from bills will hold goods per relevant clause of the contract. The bank Guarantee shall be returned immediately on successful completion of contract.

(b) The University authority will retain a sum amounting to 10% of the bill of the contract for a period of six months from the date of completion of work as **Security Deposit**. Which will be released after a period of six months from the date of completion of the work on application.

7. A sum of 5% of the estimated amount i.e. value as mentioned in the NIT. in the form of demand draft in favour of UNIVERSITY OF CALCUTTA payable at Kolkata is to be attached with the tender as earnest money failing which the tender will be treated cancelled. The earnest money will be returned to unsuccessful tenderers on application after issue of work order to the successful bidder. For successful tenderer the EMD will be returned on application after an equal amount of security deposit is deducted from the running bills.

Amount:- Rs

D.D No..... Dated / /20

Name of Issuing Bank:--

Branch :-

8. Work is to be carried out as per specification laid in the B.O.Q or PWD specification as per instruction of the University Engineer or his representative.



9. The materials brought to site for execution of the work should by no means be taken out of site without the permission of the Engineer C.U.
10. The rates must be quoted in words in figure other wise the tender will be cancelled.
11. The University will not be bound to accept the lowest bidder.
12. The University will not supply any materials to the contractor.
13. The contractor will work under the strict supervision of the Engineer/ Sub-Assistant Engineer. The estimate given along with the tender are provisional payment will be made on the actual work done jointly measured by the Engineer or his representative(Sub-Assistant Engineer) & the contractor or his representative. The contractor will have to submit bill in printed format in duplicate .
14. The contractor will have to take necessary instruction from the Engineer CU/ Sub-Assistant Engineer regarding the execution of work.
15. Defect & liability Period :- The defect & liability period will be for a period of six months from the date of completion of the job. Any defects pointed out during this period has to be mend good by the agency at their own cost failing which the retention money will be forfeited.


Sd/-

University Engineer

Name of the Agency:

Address :-

SIGNATURE OF THE CONTRACTOR WITH SEAL AND DATE

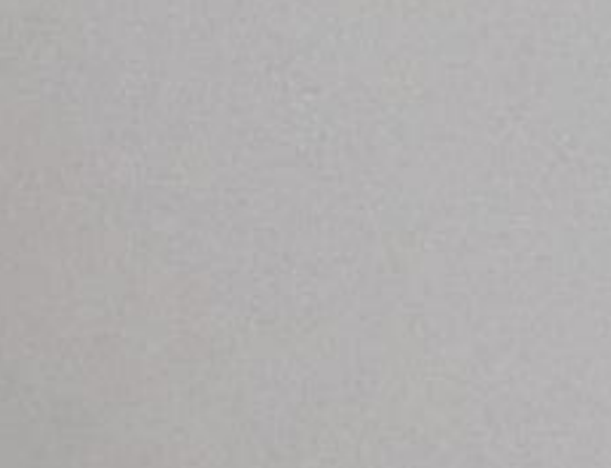

PRICE SCHEDULE FOR REPAIRING BOUNDARY WALL PART EASTERN SIDE & NORTHERN SIDE
AS PER PWD SCHEDULE 2017 AT HIRANMAYEE CHHATRI BHAVAN AT 53/2/4A HAZRA ROAD KOLKATA

SL NO	DESCRIPTION	UNIT	RATE	QTY	AMOUNT
1	Stripping off worn out plaster and raking out joints of walls, celings etc. upto any height and in any floor including removing rubbish within a lead of 75m as directed 3.28x3.28x12=	sqm	19	129.1	2452.9
		sqm	19	193.4	3674.6
2	Removal of rubbish,earth etc. from the working site and disposal of the same beyond the compound, in conformity with the Municipal / Corporation Rules for such disposal, loading into truck and cleaning the site in all respect as per 110.2X.025=2.755cum	cum	166	2.76	458.16
3	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course, scaffolding/staging where necessary (Ground floor).[Excluding cost of chipping over concrete surface] (i) With 1:6 cement mortar (a) 20 mm thick plaster	sqm	167	129.1	21559.7
4	Priming one coat on timber or plastered surface with synthetic oil bound primer of approved quality including smoothing surfaces by sand papering etc. 110.2	sqm	167	193.4	32297.8
		sqm	38	129.1	4905.8
5	Protective and Decorative Acrylic exterior emulsion paint of approved quality, as per manufacturer's specification and as per direction of Engineer-in-Charge to be applied over acrylic primer as required. The rate includes cost of material, labour, scaffolding and all incidental charges but excluding the cost of primer. In Ground floor (Two Coat) Super Protective 100% Acrylic Emulsion.	sqm	97	193.4	18759.8
		sqm	97	129.1	12522.7
6	Cement concrete (1:1.5:3) with graded stone chips 5.6 mm size with hexagonal square mesh wire netting, I.R.C. fabric mesh or X.P. M. fitted and fixed after tying the existing reinforcement on concrete without distributing the same and with proper scarping and cleaning the reinforcement and disturbed concrete with wire brush etc. after applying a coat of cement including the cost of wire netting I.R.C or X. P. M. & cost of all handling and scaffolding complete as per direction of Engineer-in -charge. 20mm thick 37.95x .025x .2x2 =.4 x10	sqm	488	4	1952
					98583.5

	11830
Add 12% GST	110413
	1104.13
Add 1% Labour Cess	111518
	111518
Total	